Vimark

Code (VM,VS,VP,VPD)	Description
1331	5A 1 Gang Unswitched Socket Round Pin
1206	13A 1 Gang Unswitched Socket
1207SP/1207SPR	13A 1 Gang Switched Socket Single Pole/ Recessed
1207DP/1207DPN	13A 1 Gang Switched Socket Double Pole/ With Neon
1208	13A 2 Gang Unswitched Socket
1209SP/1209SPR	13A 2 Gang Switched Socket Single Pole
1209DP/1209DPN	13A 2 Gang Switched Socket Double Pole/ With Neon
1281	13A 1 Gang Switched Socket Single Pole 2.1A USB (1A)
1286/1289	13A 2 Gang Switched Socket Single Pole with USB Ports

Vimark Series – 1 and 2 Gang Sockets

Features

- **Vimark Pro/Square (VP/VS)**: High grade urea front plate with antimicrobial properties
- 2 earth terminals on 2 gang sockets
- Captive, backed out terminal screws
- Earth pin operated shutters

Safety Instructions - If in doubt, contact a qualified electrician

1. These instructions should be read carefully and retained after installation for future reference and maintenance.
2. This product should be installed in accordance with current edition of IET wiring regulations, BS 7671 and local building regulations.
3. Always switch off the mains electrical supply at the consumer unit before commencing installation.
4. **Vimark Pro/Square/Décor (VP/VS/VPD):** Use appropriate size metal, dry lining or pattress mounting boxes.
5. When used, metal mounting boxes must be earthed and plastic grommets must be used to protect cable insulation.
6. When preparing cables, strip insulation to correct length to allow the conductors to reach the terminals.
7. Socket outlets must be earthed and earth conductor must be sleeved with green/yellow insulation sleeving.
8. The USB ports where integrated into a socket outlet, are for charging information technology equipment only.

Environmental Instructions

This product may contain substances that can be hazardous to the environment if not disposed of properly. Waste electrical and electronic equipment (WEEE) should never be disposed of with general household waste but must be separated for its correct treatment and recovery. Where possible recycle your packaging.

Installation Instructions

Wiring colours

As of April 2004, twin and earth cable core colours for all new fixed wiring installation in the UK have been updated. Refer to the table below for twin and earth wiring colours identification.

	Wiring colours	
	Pre April 2004	**Post April 2004**
Live	Red	Brown
Neutral	Black	Blue
Earth	Yellow/Green	Yellow/Green


SUGGESTED METHOD OF INSTALLATION

Read instructions and check you have all the tools and accessories to complete the installation safely and in compliance with current electrical regulations


1. Ensure the electrical supply is switched off.
2. **Vimark Pro/Square/Décor (VP/VS/VPD):** Install a metal/pattress box on a wall and route the power cable through a knockout on the box.
   Vimark Metalclad (VM): Install the 'Metalclad' backbox on the wall and route the power cable through a knockout on the box.
3. Prepare the power cable by stripping the live, neutral and earth wires to required length.
4. Take the new socket and loosen the terminals at the back. Insert the Live, Neutral and Earth wires into their respective terminals and tighten the terminal screws. Follow the diagrams in this document for typical wiring details of different variants of 1 and 2 gang socket outlets.
5. If a metal mounting box is installed, it must be earthed; and bare earth conductors must be sleeved with green/yellow insulation sleeving.
6. **Vimark Pro/Square/Décor (VP/VS/VPD):** Screw the socket onto the metal/pattress box on the wall.
   Vimark Metalclad (VM): Screw the front plate onto the mounted backbox with the screws provided.
7. Switch on the power supply and check the operation.

Note: The wiring diagrams in this document are for a ring mains circuit. For a radial circuit or a spur from a ring man, only a single cable is required.


5A 1 Gang Unswitched Socket Outlet

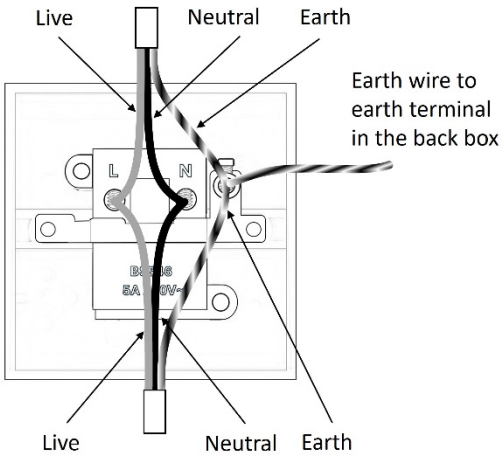


13A 1 Gang Unswitched Socket Outlet

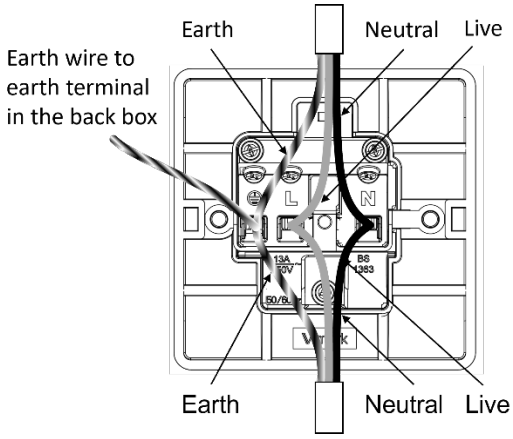


13A 1 Gang Switched Socket Outlet Single Pole

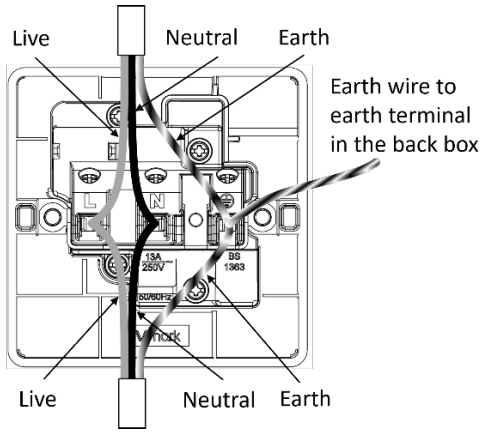


13A 2 Gang Switched Socket Outlet Single Pole

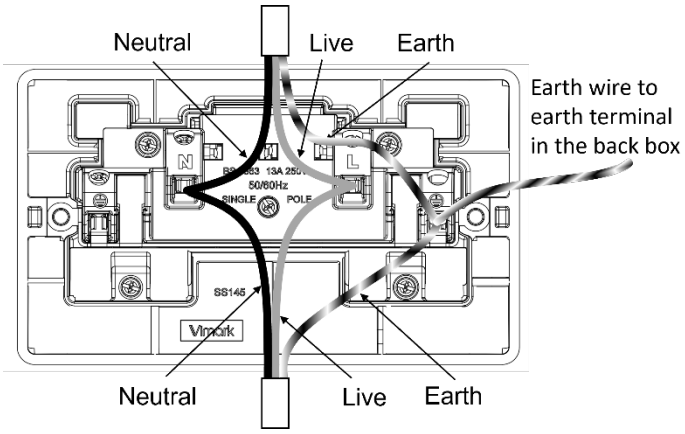


13A 1 Gang Switched Socket Outlet Double Pole

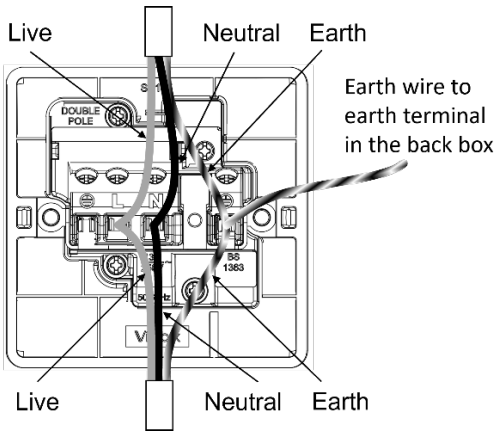


13A 2 Gang Switched Socket Outlet Double Pole

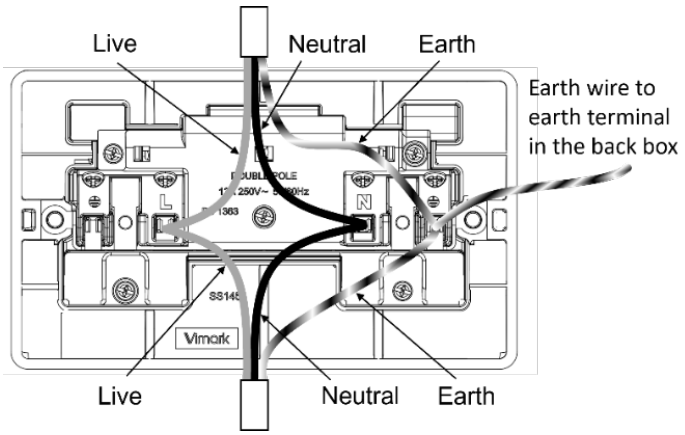

13A 2 Gang Unswitched Socket Outlet

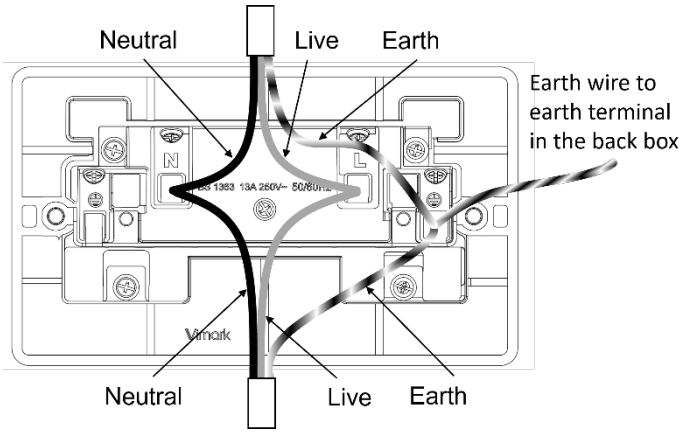

13A 2 Gang Switched Socket Outlet Single Pole with USB Charging Ports

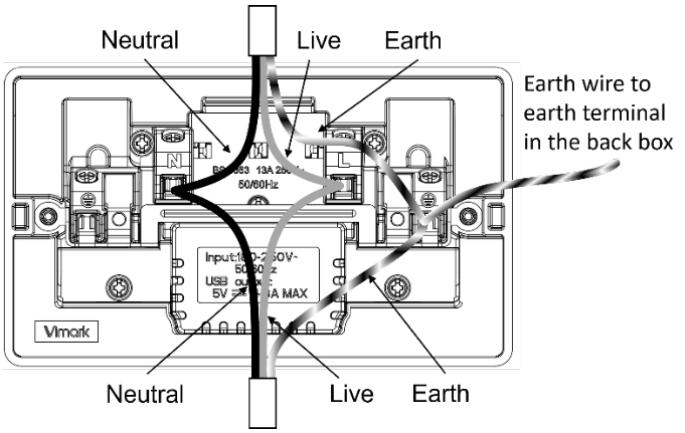

USB Sockets

- USB Charger is compatible with portable devices such as smart phones and tablets that require charging via USB type A and C ports.
- The front surface of this product may become warm when in use.

Note: If mounting a USB socket on a 25mm back box, there is restricted bottom cable entry access

Specification				
Input Voltage		250V ac 50/60Hz	USB Output Voltage	5V DC
Current Ratings		5A, 13A	Terminal Capacity	4 x 2.5mm²
Mounting Box Recommended Depth	VP/VS/VPD	25mm	Compliance	BS 1363-2
	VM	38mm		BS 546

Deta Electrical Company Limited
UK: Panattoni Park Luton Road Chalton Bedfordshire LU4 9TT
EU: Unit 16 Ashbourne Ind. Est. Ashbourne Co. Meath A84 W972
deta.co.uk | Technical Helpline: +44(0)1582 544 548

INS 0199 V3.2 11/24 NPD 0738/0774/0777/0841