**Winstar Display Co., LTD**
**華凌光電股份有限公司**

*住址: 407 台中市中清路 163 號*
*No.163 Chung Ching RD.,*
*Taichune, Taiwan, R.O.C*

*WEB: http://www.winstar.com.tw*
*E-mail: sales@winstar.com.tw*
*Tel:886-4-24262208 Fax：886-4-24262207*

# SPECIFICATION

**CUSTOMER :** _____

**MODULE NO.: WH2004A-NYG-JT#**

| | |
|---|---|
| **APPROVED BY:**<br>**( FOR CUSTOMER USE ONLY )** | **PCB VERSION:** **DATA:** |

| SALES BY | APPROVED BY | CHECKED BY | PREPARED BY |
|---|---|---|---|
| | | | |

| VERSION | DATE | REVISED PAGE NO. | SUMMARY |
|---|---|---|---|
| A | 2008/11/10 | 13 | Modify Character Generator ROM Pattern |

MODLE NO：

**DOC. FIRST ISSUE**

## RECORDS OF REVISION

| VERSION | DATE | REVISED PAGE NO. | **SUMMARY** |
|---|---|---|---|
| 0 | 2007-3-22 | | First issue |
| A | 2008/11/10 | 13 | Modify Character Generator ROM Pattern |

# Contents

1.Module Classification Information

2.Precautions in use of LCD Modules

3.General Specification

4.Absolute Maximum Ratings

5.Electrical Characteristics

6.Optical Characteristics

7.Interface Pin Function

8.Contour Drawing & Block Diagram

9.Function Description

10.Character Generator ROM Pattern

11.Instruction Table

12.Timing Characteristics

13.Initializing of LCM

14.Reliability

15. Inspection specification

16. Material List of Components for RoHs

# 1.Module Classification Information

WH 2004 A－NYG－ JT#
①② ③ ④ ⑤⑥⑦ ⑧

① Brand：WINSTAR DISPLAY CORPORATION
② Display Type：H→Character Type, G→Graphic Type
③ Display Font：Character 20 words, 4Lines.
④ Model serials no.
⑤ Backlight Type：
N→Without backlight
B→EL, Blue green
D→EL, Green
W→EL, White
F→CCFL, White
Y→LED, Yellow Green
T→LED, White
A→LED, Amber
R→LED, Red
O→LED, Orange
G→LED, Green
⑥ LCD Mode：
B→TN Positive, Gray
N→TN Negative,
G→STN Positive, Gray
Y→STN Positive, Yellow Green
M→STN Negative, Blue
F→FSTN Positive
T→FSTN Negative
⑦ LCD Polarizer Type/ Temperature range/ View direction
A→Reflective, N.T, 6:00
D→Reflective, N.T, 12:00
G→Reflective, W. T, 6:00
J→Reflective, W. T, 12:00
B→Transflective, N.T,6:00
E→Transflective, N.T.12:00
H→Transflective, W.T,6:00
K→Transflective, W.T,12:00
C→Transmissive, N.T,6:00
F→Transmissive, N.T,12:00
I→Transmissive, W. T, 6:00
L→Transmissive, W.T,12:00
⑧ Special Code
JT : English and Japanese standard font
#:Fit in with the ROHS Directions and regulations

# 2.Precautions in use of LCD Modules

(1)Avoid applying excessive shocks to the module or making any alterations or modifications to it.
(2)Don't make extra holes on the printed circuit board, modify its shape or change the components of LCD module.
(3)Don't disassemble the LCM.
(4)Don't operate it above the absolute maximum rating.
(5)Don't drop, bend or twist LCM.
(6)Soldering: only to the I/O terminals.
(7)Storage: please storage in anti-static electricity container and clean environment.
(8). Winstar have the right to change the passive components
(9). Winstar have the right to change the PCB Rev.

# 3.General Specification

| Item | Dimension | Unit |
|---|---|---|
| Number of Characters | 20 characters x 4Lines | — |
| Module dimension | 98.0 x 60.0 x 9.3(MAX) | mm |
| View area | 77.0 x 25.2 | mm |
| Active area | 70.4 x 20.8 | mm |
| Dot size | 0.55 x 0.55 | mm |
| Dot pitch | 0.60 x 0.60 | mm |
| Character size | 2.95 x 4.75 | mm |
| Character pitch | 3.55 x 5.35 | mm |
| LCD type | STN Positive, Yellow Green , Reflective,<br>(In LCD production, It will occur slightly color difference. We can only guarantee the same color in the same batch.) | |
| Duty | 1/16 | |
| View direction | 6 o'clock | |
| Backlight Type | N/A | |


# 4.Absolute Maximum Ratings

| Item | Symbol | Min | Typ | Max | Unit |
|---|---|---|---|---|---|
| Operating Temperature | $T_{OP}$ | -20 | — | +70 | ℃ |
| Storage Temperature | $T_{ST}$ | -30 | — | +80 | ℃ |
| Input Voltage | $V_I$ | $V_{SS}$ | — | $V_{DD}$ | V |
| Supply Voltage For Logic | $V_{DD}$-$V_{SS}$ | -0.3 | — | 7 | V |
| Supply Voltage For LCD | $V_{DD}$-$V_0$ | -0.3 | — | 5.5 | V |

# 5.Electrical Characteristics

| Item | Symbol | Condition | Min | Typ | Max | Unit |
|---|---|---|---|---|---|---|
| Supply Voltage For Logic | $V_{DD}$-$V_{SS}$ | — | 4.5 | 5.0 | 5.5 | V |
| Supply Voltage For LCD *Note | $V_{DD}$-$V_0$ | Ta=-20℃ | — | — | 4.8 | V |
| | | Ta=25℃ | — | 4.5 | — | V |
| | | Ta=70℃ | 4.2 | — | — | V |
| Input High Volt. | $V_{IH}$ | — | 0.7 $V_{DD}$ | — | $V_{DD}$ | V |
| Input Low Volt. | $V_{IL}$ | — | $V_{SS}$ | — | 0.6 | V |
| Output High Volt. | $V_{OH}$ | — | 3.9 | — | — | V |
| Output Low Volt. | $V_{OL}$ | — | — | — | 0.4 | V |
| Supply Current | $I_{DD}$ | $V_{DD}$=5V | — | 1.6 | — | mA |


* Note: Please design the VOP adjustment circuit on customer's main board



# 6.Optical Characteristics


| Item | Symbol | Condition | Min | Typ | Max | Unit |
|---|---|---|---|---|---|---|
| View Angle | (V) $\theta$ | CR≧2 | 20 | — | 40 | deg |
| | (H) $\varphi$ | CR≧2 | -30 | — | 30 | deg |
| Contrast Ratio | CR | — | — | 3 | — | — |
| Response Time | T rise | — | — | 150 | 200 | ms |
| | T fall | — | — | 150 | 200 | ms |

**Definition of Operation Voltage (Vop)**

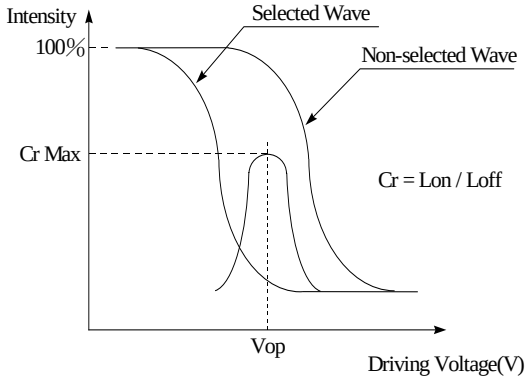


[positive type]

**Definition of Response Time ( Tr , Tf )**

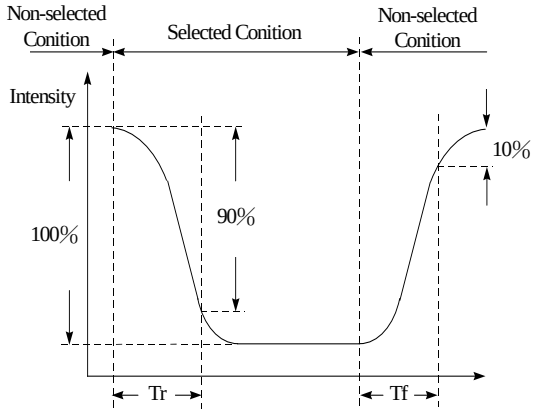



[positive type]

**Conditions :**

Operating Voltage : Vop  Viewing Angle( $\theta$ ， $\varphi$ ) : 0°， 0°

Frame Frequency : 64 HZ  Driving Waveform : 1/N duty , 1/a bias


## Definition of viewing angle(CR≧2)

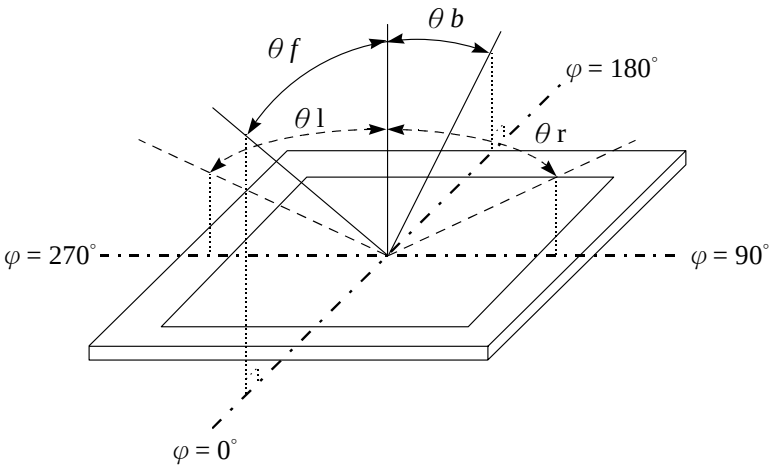


# 7.Interface Pin Function


| Pin No. | Symbol | Level | Description |
|---|---|---|---|
| 1 | $V_{SS}$ | 0V | Ground |
| 2 | $V_{DD}$ | 5.0V | Supply Voltage for logic |
| 3 | VO | (Variable) | Operating voltage for LCD |
| 4 | RS | H/L | H: DATA, L: Instruction code |
| 5 | R/W | H/L | H: Read(MPU→Module) L: Write(MPU→Module) |
| 6 | E | H,H→L | Chip enable signal |
| 7 | DB0 | H/L | Data bus line |
| 8 | DB1 | H/L | Data bus line |
| 9 | DB2 | H/L | Data bus line |
| 10 | DB3 | H/L | Data bus line |
| 11 | DB4 | H/L | Data bus line |
| 12 | DB5 | H/L | Data bus line |
| 13 | DB6 | H/L | Data bus line |
| 14 | DB7 | H/L | Data bus line |
| 15 | A | — | NC |
| 16 | K | — | NC |


# 8.Contour Drawing &Block Diagram

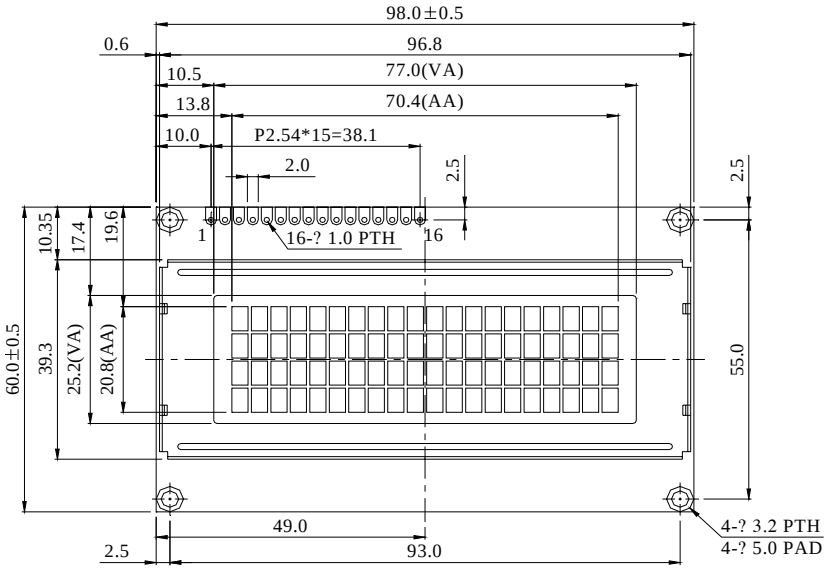

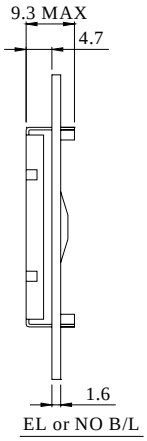
| PIN NO. | SYMBOL |
|---|---|
| 1 | Vss |
| 2 | Vdd |
| 3 | Vo |
| 4 | RS |
| 5 | R/$\overline{W}$ |
| 6 | E |
| 7 | DB0 |
| 8 | DB1 |
| 9 | DB2 |
| 10 | DB3 |
| 11 | DB4 |
| 12 | DB5 |
| 13 | DB6 |
| 14 | DB7 |
| 15 | A |
| 16 | K |




| Character located | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| DDRAM address | 00 | 01 | 02 | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 0A | 0B | 0C | 0D | 0E | 0F | 10 | 11 | 12 | 13 |
| DDRAM address | 40 | 41 | 42 | 43 | 44 | 45 | 46 | 47 | 48 | 49 | 4A | 4B | 4C | 4D | 4E | 4F | 50 | 51 | 52 | 53 |
| DDRAM address | 14 | 15 | 16 | 17 | 18 | 19 | 1A | 1B | 1C | 1D | 1E | 1F | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 |
| DDRAM address | 54 | 55 | 56 | 57 | 58 | 59 | 5A | 5B | 5C | 5D | 5E | 5F | 60 | 61 | 62 | 63 | 64 | 65 | 66 | 67 |
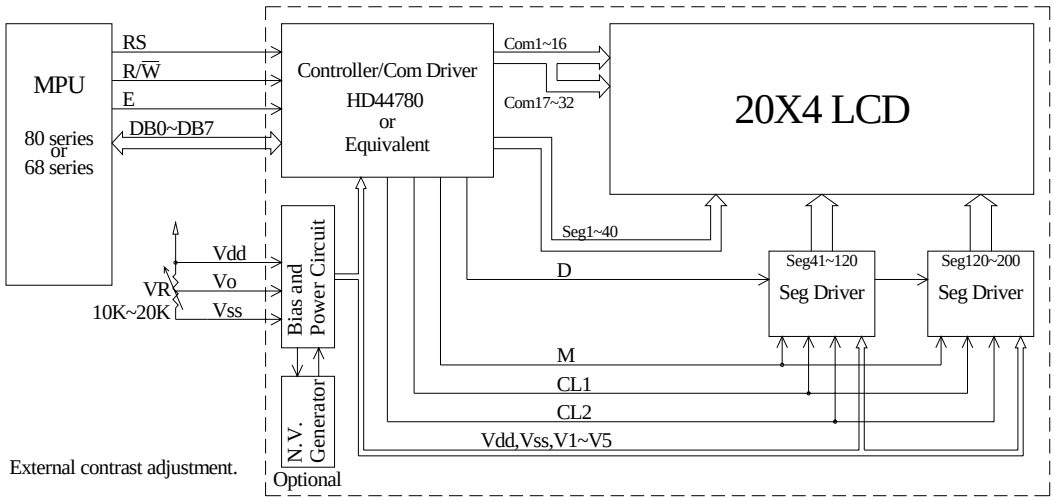
# 9.Function Description


The LCD display Module is built in a LSI controller, the controller has two 8-bit registers, an instruction register (IR) and a data register (DR).
The IR stores instruction codes, such as display clear and cursor shift, and address information for display data RAM (DDRAM) and character generator (CGRAM). The IR can only be written from the MPU. The DR temporarily stores data to be written or read from DDRAM or CGRAM. When address information is written into the IR, then data is stored into the DR from DDRAM or CGRAM. By the register selector (RS) signal, these two registers can be selected.

| RS | R/W | Operation |
|---|---|---|
| 0 | 0 | IR write as an internal operation (display clear, etc.) |
| 0 | 1 | Read busy flag (DB7) and address counter (DB0 to DB7) |
| 1 | 0 | Write data to DDRAM or CGRAM (DR to DDRAM or CGRAM) |
| 1 | 1 | Read data from DDRAM or CGRAM (DDRAM or CGRAM to DR) |

**Busy Flag (BF)**
When the busy flag is 1, the controller LSI is in the internal operation mode, and the next instruction will not be accepted. When RS=0 and R/W=1, the busy flag is output to DB7. The next instruction must be written after ensuring that the busy flag is 0.

**Address Counter (AC)**
The address counter (AC) assigns addresses to both DDRAM and CGRAM

**Display Data RAM (DDRAM)**
This DDRAM is used to store the display data represented in 8-bit character codes. Its extended capacity is 80×8 bits or 80 characters. Below figure is the relationships between DDRAM addresses and positions on the liquid crystal display.

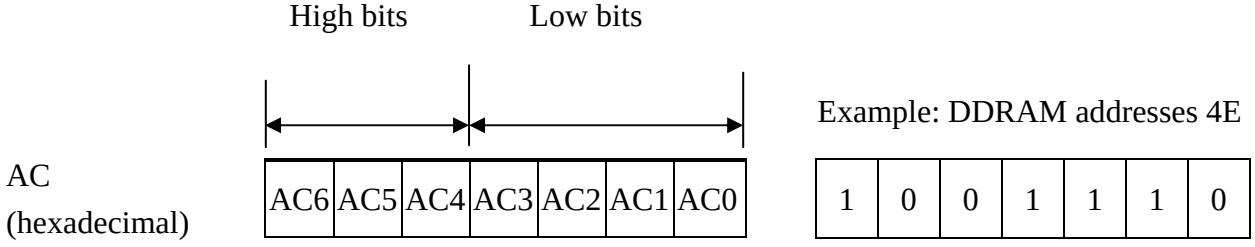

Display position DDRAM address

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 00 | 01 | 02 | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 0A | 0B | 0C | 0D | 0E | 0F | 10 | 11 | 12 | 13 |
| 40 | 41 | 42 | 43 | 44 | 45 | 46 | 47 | 48 | 49 | 4A | 4B | 4C | 4D | 4E | 4F | 50 | 51 | 52 | 53 |
| 14 | 15 | 16 | 17 | 18 | 19 | 1A | 1B | 1C | 1D | 1E | 1F | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 |
| 54 | 55 | 56 | 57 | 58 | 59 | 5A | 5B | 5C | 5D | 5E | 5F | 60 | 61 | 62 | 63 | 64 | 65 | 66 | 67 |

4-Line by 20-Character Display

**Character Generator ROM (CGROM)**

The CGROM generate 5×8 dot or 5×10 dot character patterns from 8-bit character codes. See Table 2.

**Character Generator RAM (CGRAM)**


In CGRAM, the user can rewrite character by program. For 5×8 dots, eight character patterns can be written, and for 5×10 dots, four character patterns can be written.

Write into DDRAM the character code at the addresses shown as the left column of table 1. To show the character patterns stored in CGRAM.


## Relationship between CGRAM Addresses, Character Codes (DDRAM) and Character patterns

### Table 1.

For 5 * 8 dot character patterns

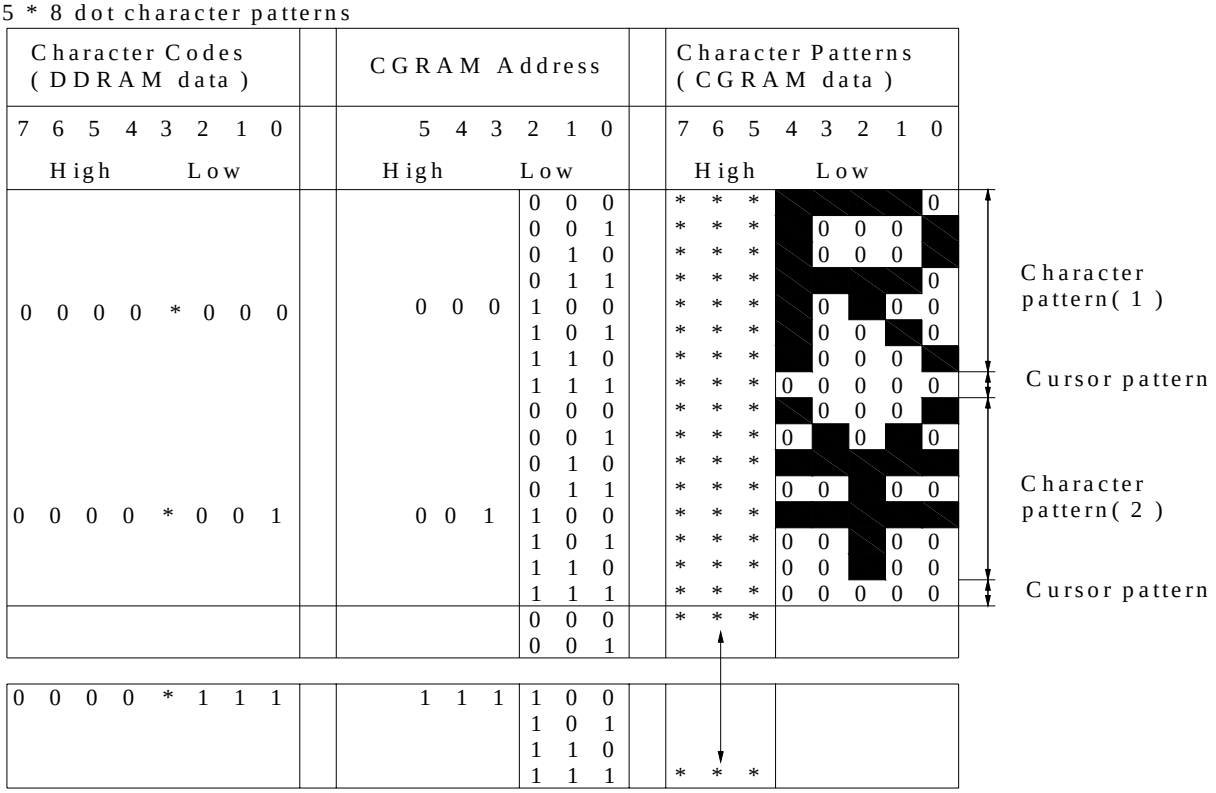


For 5 * 10 dot character patterns

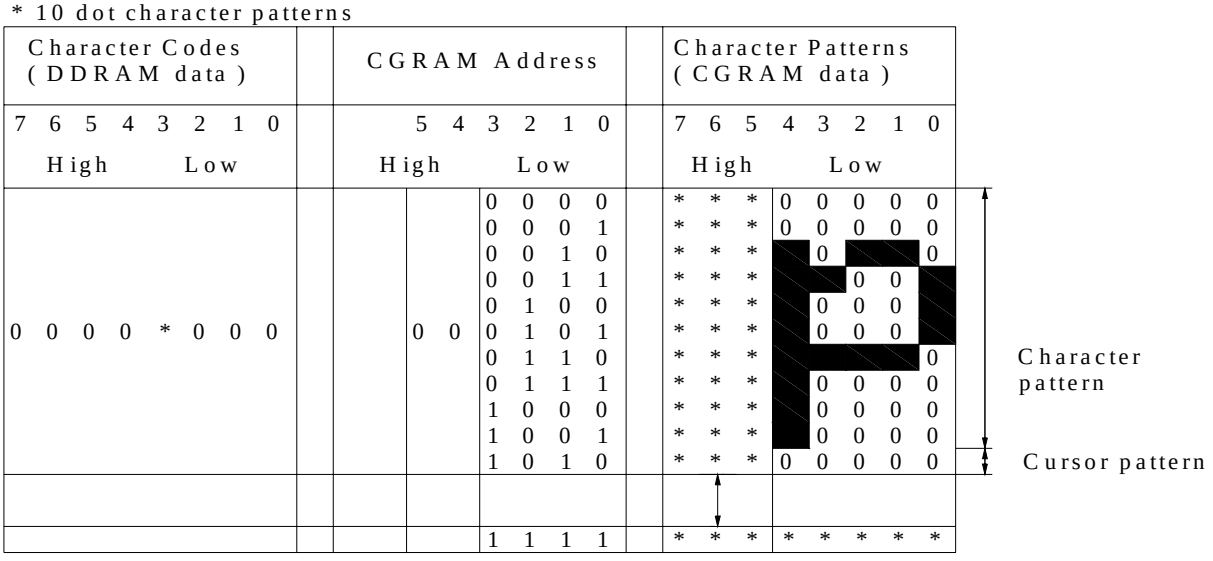


■ : " High "

# 10.Character Generator ROM Pattern

**Table.2**

| Upper 4 bit / Lower 4 bit | LLLL | LLLH | LLHL | LLHH | LHLL | LHLH | LHHL | LHHH | HLLL | HLLH | HLHL | HLHH | HHLL | HHLH | HHHL | HHHH |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| LLLL | CG RAM (1) | | | | | | | | | | | | | | | |
| LLLH | (2) | | | | | | | | | | | | | | | |
| LLHL | (3) | | | | | | | | | | | | | | | |
| LLHH | (4) | | | | | | | | | | | | | | | |
| LHLL | (5) | | | | | | | | | | | | | | | |
| LHLH | (6) | | | | | | | | | | | | | | | |
| LHHL | (7) | | | | | | | | | | | | | | | |
| LHHH | (8) | | | | | | | | | | | | | | | |
| HLLL | (1) | | | | | | | | | | | | | | | |
| HLLH | (2) | | | | | | | | | | | | | | | |
| HLHL | (3) | | | | | | | | | | | | | | | |
| HLHH | (4) | | | | | | | | | | | | | | | |
| HHLL | (5) | | | | | | | | | | | | | | | |
| HHLH | (6) | | | | | | | | | | | | | | | |
| HHHL | (7) | | | | | | | | | | | | | | | |
| HHHH | (8) | | | | | | | | | | | | | | | |

# 11.Instruction Table


| Instruction | Instruction Code | | | | | | | | | | Description | Execution time (fosc=270Khz) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | RS | R/W | DB7 | DB6 | DB5 | DB4 | DB3 | DB2 | DB1 | DB0 | | |
| Clear Display | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | Write “00H” to DDRAM and set DDRAM address to “00H” from AC | 1.53ms |
| Return Home | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | — | Set DDRAM address to “00H” from AC and return cursor to its original position if shifted. The contents of DDRAM are not changed. | 1.53ms |
| Entry Mode Set | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | I/D | SH | Assign cursor moving direction and enable the shift of entire display. | 39 $\mu$s |
| Display ON/OFF Control | 0 | 0 | 0 | 0 | 0 | 0 | 1 | D | C | B | Set display (D), cursor (C), and blinking of cursor (B) on/off control bit. | 39 $\mu$s |
| Cursor or Display Shift | 0 | 0 | 0 | 0 | 0 | 1 | S/C | R/L | — | — | Set cursor moving and display shift control bit, and the direction, without changing of DDRAM data. | 39 $\mu$s |
| Function Set | 0 | 0 | 0 | 0 | 1 | DL | N | F | — | — | Set interface data length (DL:8-bit/4-bit), numbers of display line (N:2-line/1-line)and, display font type (F:5x11 dots/5x8 dots) | 39 $\mu$s |
| Set CGRAM Address | 0 | 0 | 0 | 1 | AC5 | AC4 | AC3 | AC2 | AC1 | AC0 | Set CGRAM address in address counter. | 39 $\mu$s |
| Set DDRAM Address | 0 | 0 | 1 | AC6 | AC5 | AC4 | AC3 | AC2 | AC1 | AC0 | Set DDRAM address in address counter. | 39 $\mu$s |
| Read Busy Flag and Address | 0 | 1 | BF | AC6 | AC5 | AC4 | AC3 | AC2 | AC1 | AC0 | Whether during internal operation or not can be known by reading BF. The contents of address counter can also be read. | 0 $\mu$s |
| Write Data to RAM | 1 | 0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | Write data into internal RAM (DDRAM/CGRAM). | 43 $\mu$s |
| Read Data from RAM | 1 | 1 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | Read data from internal RAM (DDRAM/CGRAM). | 43 $\mu$s |

＊ ”—”：don’t care

# 12.Timing Characteristics

## 12.1 Write Operation

- Writing data from MPU

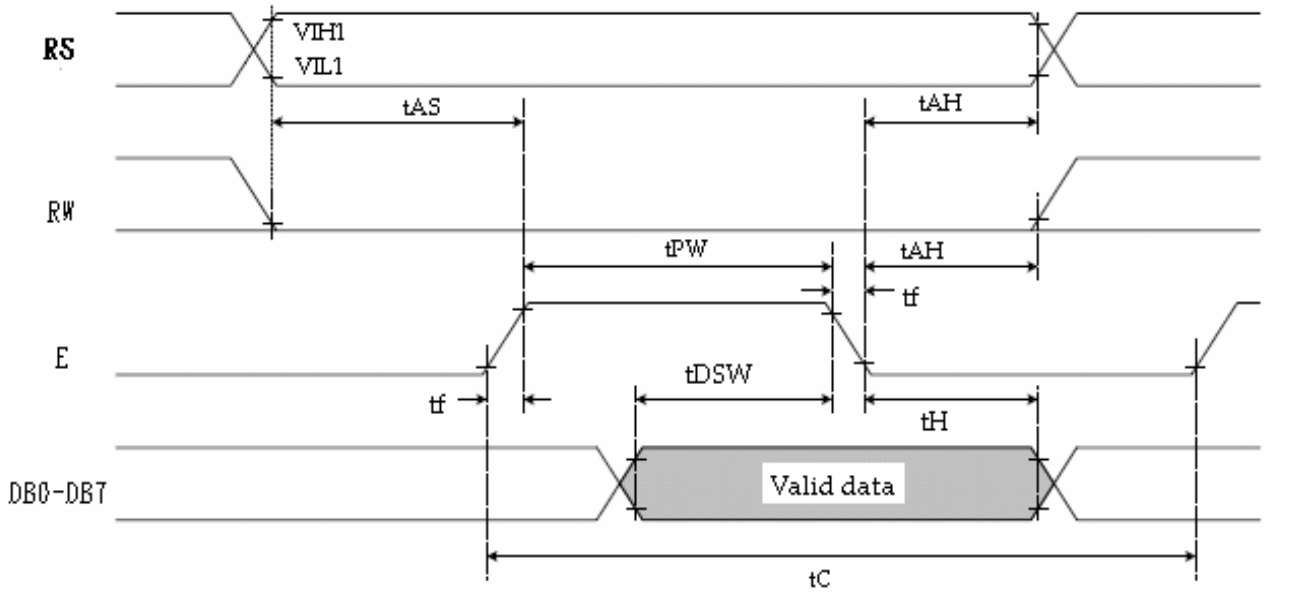



Ta=25℃, VDD=5.0V

| Item | Symbol | Min | Typ | Max | Unit |
|---|---|---|---|---|---|
| Enable cycle time | $T_C$ | 1200 | — | — | ns |
| Enable pulse width | $T_{PW}$ | 140 | — | — | ns |
| Enable rise/fall time | $T_R$,$T_F$ | — | — | 25 | ns |
| Address set-up time (RS, R/W to E) | $t_{AS}$ | 0 | — | — | ns |
| Address hold time | $t_{AH}$ | 10 | — | — | ns |
| Data set-up time | $t_{DSW}$ | 40 | — | — | ns |
| Data hold time | $t_H$ | 10 | — | — | ns |

## 12.2 Read Operation


- Reading data from ST7066U

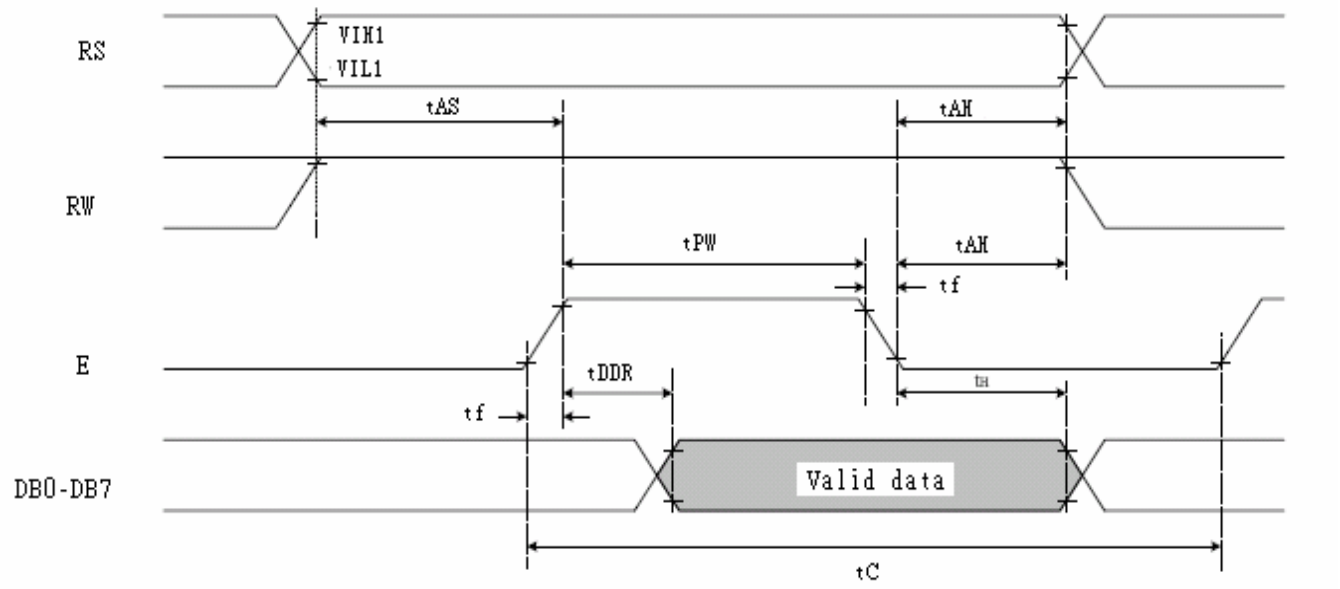



Ta=25℃, VDD=5V

| Item | Symbol | Min | Typ | Max | Unit |
|---|---|---|---|---|---|
| Enable cycle time | $T_C$ | 1200 | — | — | ns |
| Enable pulse width (high level) | $T_{PW}$ | 140 | — | — | ns |
| Enable rise/fall time | $T_R$,$T_F$ | — | — | 25 | ns |
| Address set-up time (RS, R/W to E) | $t_{AS}$ | 0 | — | — | ns |
| Address hold time | $t_{AH}$ | 10 | — | — | ns |
| Data delay time | $t_{DDR}$ | — | — | 100 | ns |
| Data hold time | $t_H$ | 10 | — | — | ns |

# 13.Initializing of LCM

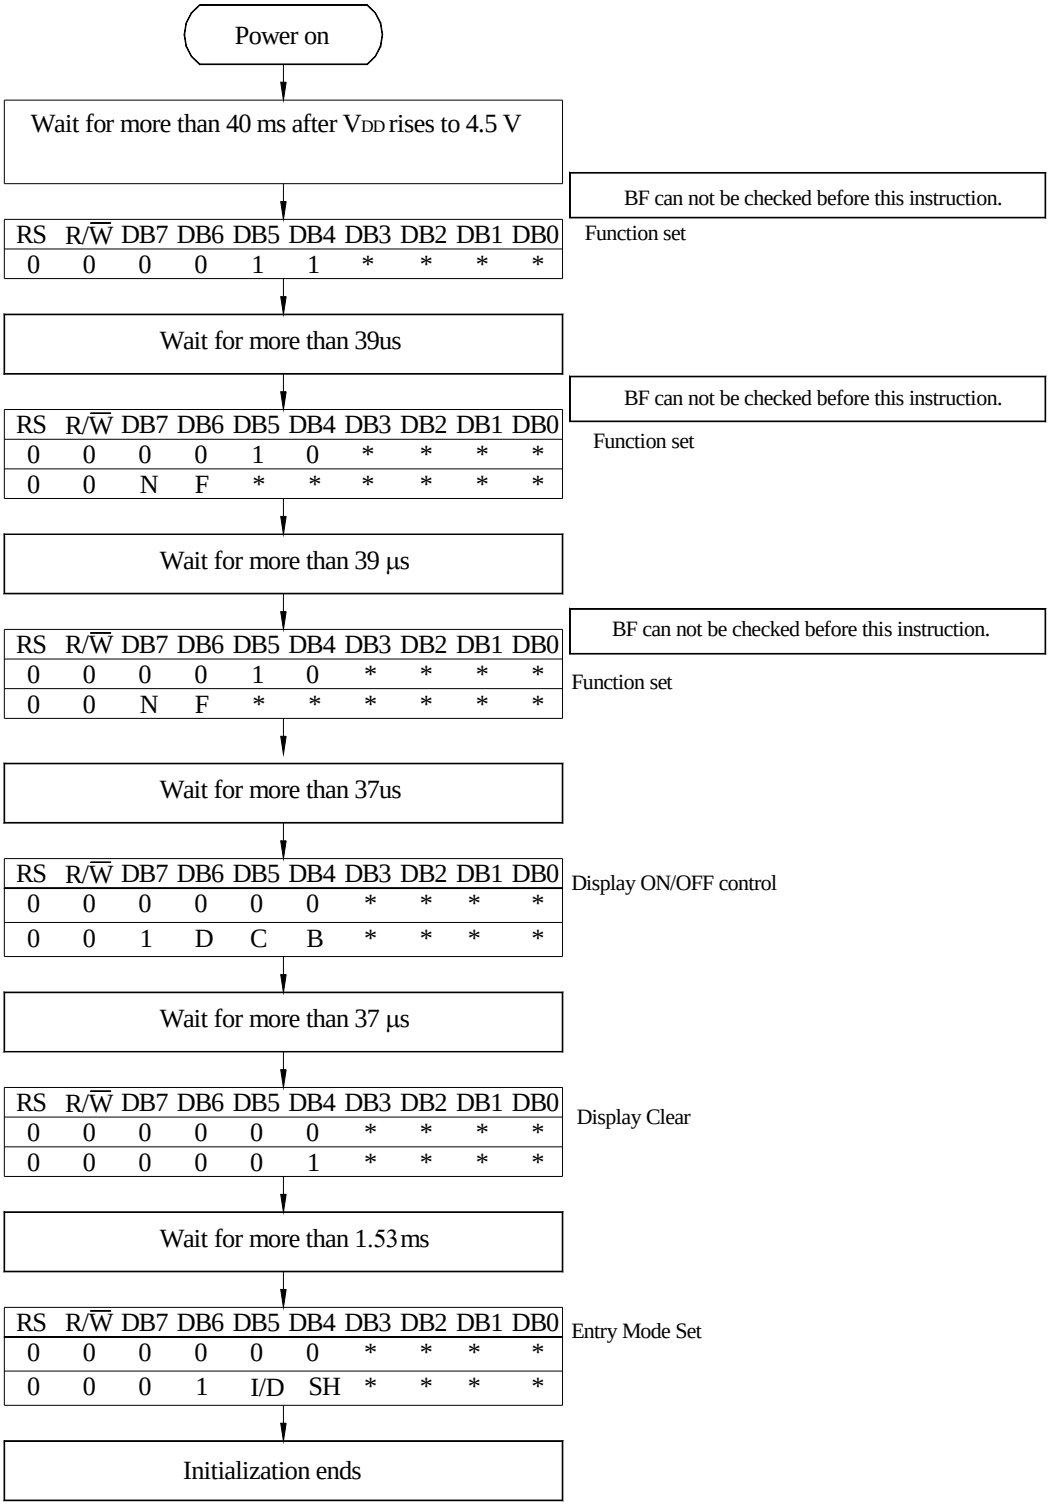



4-Bit Ineterface

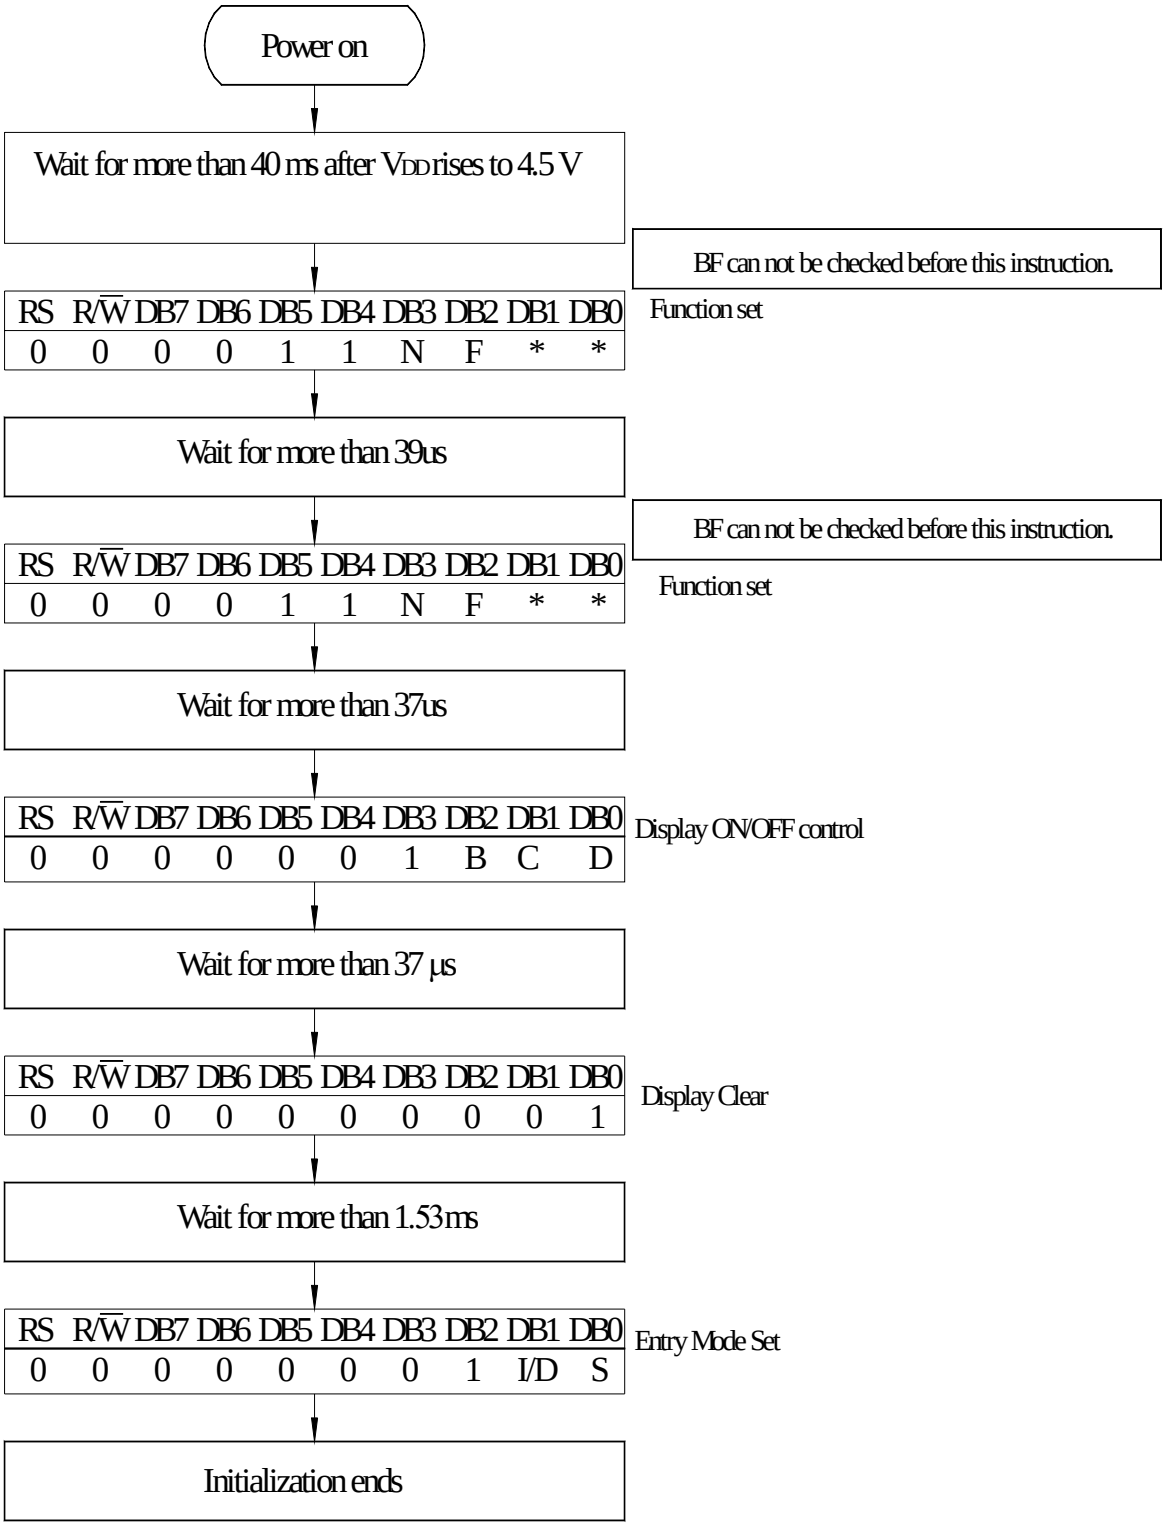


8-Bit Ineterface

# 14.Reliability

## Content of Reliability Test (wide temperature, -20℃~70℃)


| Environmental Test | | | |
|---|---|---|---|
| **Test Item** | **Content of Test** | **Test Condition** | **Note** |
| High Temperature storage | Endurance test applying the high storage temperature for a long time. | 80℃<br>200hrs | 2 |
| Low Temperature storage | Endurance test applying the high storage temperature for a long time. | -30℃<br>200hrs | 1,2 |
| High Temperature Operation | Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time. | 70℃<br>200hrs | —— |
| Low Temperature Operation | Endurance test applying the electric stress under low temperature for a long time. | -20℃<br>200hrs | 1 |
| High Temperature/ Humidity Operation | The module should be allowed to stand at 60 ℃,90%RH max<br>For 96hrs under no-load condition excluding the polarizer,<br>Then taking it out and drying it at normal temperature. | 60℃,90%RH<br>96hrs | 1,2 |
| Thermal shock resistance | The sample should be allowed stand the following 10 cycles of<br>operation<br>-20℃ 25℃ 70℃<br><br>30min 5min 30min<br>1 cycle | -20℃/70℃<br>10 cycles | —— |
| Vibration test | Endurance test applying the vibration during transportation and using. | Total fixed amplitude : 1.5mm<br>Vibration Frequency : 10~55Hz<br>One cycle 60 seconds to 3 directions of X,Y,Z for<br>Each 15 minutes | 3 |
| Static electricity test | Endurance test applying the electric stress to the terminal. | VS=800V,RS=1.5kΩ<br>CS=100pF<br>1 time | —— |


**Note1: No dew condensation to be observed.**

**Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.**



**Note3: Vibration test will be conducted to the product itself without putting it in a container.**


# 15. Inspection specification


<table>
<tr><th>NO</th><th>Item</th><th>Criterion</th><th>AQL</th></tr>
<tr><td>01</td><td>Electrical Testing</td><td>1.1 Missing vertical, horizontal segment, segment contrast defect.<br>1.2 Missing character , dot or icon.<br>1.3 Display malfunction.<br>1.4 No function or no display.<br>1.5 Current consumption exceeds product specifications.<br>1.6 LCD viewing angle defect.<br>1.7 Mixed product types.<br>1.8 Contrast defect.</td><td>0.65</td></tr>
<tr><td>02</td><td>Black or white spots on LCD (display only)</td><td>2.1 White and black spots on display ≦0.25mm, no more than three white or black spots present.<br>2.2 Densely spaced: No more than two spots or lines within 3mm</td><td>2.5</td></tr>
<tr><td rowspan="2">03</td><td rowspan="2">LCD black spots, white spots, contamination (non-display)</td><td>3.1 Round type : As following drawing<br>Φ=( x + y ) / 2<br>


<table>
<tr><th>SIZE</th><th>Acceptable Q TY</th></tr>
<tr><td>Φ ≦0.10</td><td>Accept no dense</td></tr>
<tr><td>0.10＜ Φ ≦0.20</td><td>2</td></tr>
<tr><td>0.20＜ Φ ≦0.25</td><td>1</td></tr>
<tr><td>0.25＜ Φ</td><td>0</td></tr>
</table></td><td>2.5</td></tr>
<tr><td>3.2 Line type : (As following drawing)<br>


<table>
<tr><th>Length</th><th>Width</th><th>Acceptable Q TY</th></tr>
<tr><td>---</td><td>W≦0.02</td><td>Accept no dense</td></tr>
<tr><td>L≦3.0</td><td>0.02＜W≦0.03</td><td rowspan="2">2</td></tr>
<tr><td>L≦2.5</td><td>0.03＜W≦0.05</td></tr>
<tr><td>---</td><td>0.05＜W</td><td>As round type</td></tr>
</table></td><td>2.5</td></tr>
<tr><td>04</td><td>Polarizer bubbles</td><td>If bubbles are visible, judge using black spot specifications, not easy to find, must check in specify direction.
<table>
<tr><th>Size Φ</th><th>Acceptable Q TY</th></tr>
<tr><td>Φ ≦0.20</td><td>Accept no dense</td></tr>
<tr><td>0.20＜ Φ ≦0.50</td><td>3</td></tr>
<tr><td>0.50＜ Φ ≦1.00</td><td>2</td></tr>
<tr><td>1.00＜ Φ</td><td>0</td></tr>
<tr><td>Total Q TY</td><td>3</td></tr>
</table></td><td>2.5</td></tr>
</table>
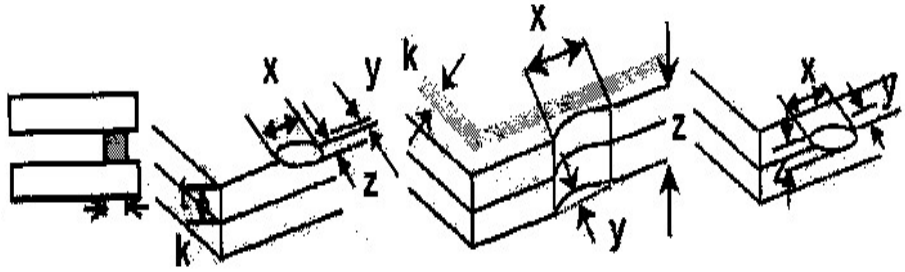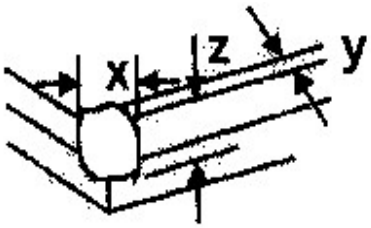
<table>
<tr><td>NO</td><td>Item</td><td>Criterion</td><td>AQL</td></tr>
<tr><td>05</td><td>Scratches</td><td>Follow NO.3 LCD black spots, white spots, contamination</td><td></td></tr>
<tr><td>06</td><td>Chipped glass</td><td>Symbols Define:<br>x: Chip length y: Chip width z: Chip thickness<br>k: Seal width t: Glass thickness a: LCD side length<br>L: Electrode pad length:<br><br>6.1 General glass chip :<br>6.1.1 Chip on panel surface and crack between panels:<br><br><br><table><tr><td>z: Chip thickness</td><td>y: Chip width</td><td>x: Chip length</td></tr><tr><td>Z≦1/2t</td><td>Not over viewing area</td><td>x≦1/8a</td></tr><tr><td>1/2t＜z≦2t</td><td>Not exceed 1/3k</td><td>x≦1/8a</td></tr></table>⊙If there are 2 or more chips, x is total length of each chip.<br><br>6.1.2 Corner crack:<br><br><br><table><tr><td>z: Chip thickness</td><td>y: Chip width</td><td>x: Chip length</td></tr><tr><td>Z≦1/2t</td><td>Not over viewing area</td><td>x≦1/8a</td></tr><tr><td>1/2t＜z≦2t</td><td>Not exceed 1/3k</td><td>x≦1/8a</td></tr></table>⊙If there are 2 or more chips, x is the total length of each chip.</td><td>2.5</td></tr>
</table>

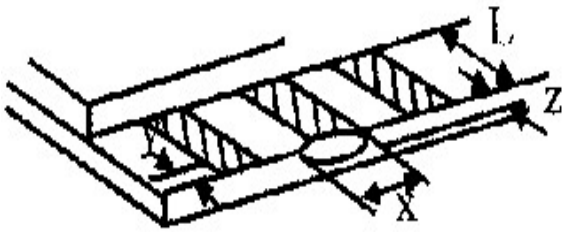
<table>
<tr><th>NO</th><th>Item</th><th>Criterion</th><th>AQL</th></tr>
<tr><td>06</td><td>Glass crack</td><td>
Symbols :<br>
x: Chip length y: Chip width z: Chip thickness<br>
k: Seal width t: Glass thickness a: LCD side length<br>
L: Electrode pad length<br>
6.2 Protrusion over terminal :<br>
6.2.1 Chip on electrode pad :<br>

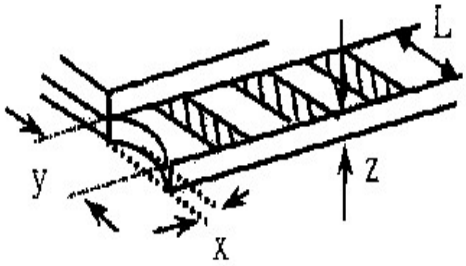
<table>
<tr><td>y: Chip width</td><td>x: Chip length</td><td>z: Chip thickness</td></tr>
<tr><td>y≦0.5mm</td><td>x≦1/8a</td><td>0 ＜ z ≦ t</td></tr>
</table>
6.2.2 Non-conductive portion:<br>

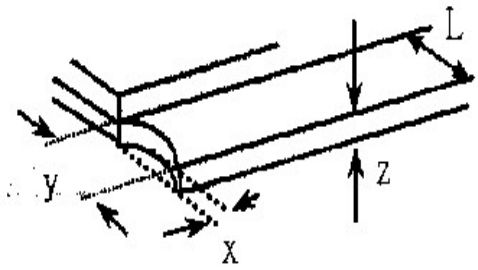


<table>
<tr><td>y: Chip width</td><td>x: Chip length</td><td>z: Chip thickness</td></tr>
<tr><td>y≦ L</td><td>x≦1/8a</td><td>0 ＜ z ≦ t</td></tr>
</table>
⊙If the chipped area touches the ITO terminal, over 2/3 of the ITO must remain and be inspected according to electrode terminal specifications.<br>
⊙If the product will be heat sealed by the customer, the alignment mark not be damaged.<br>
6.2.3 Substrate protuberance and internal crack.<br>


<table>
<tr><td>y: width</td><td>x: length</td></tr>
<tr><td>y≦1/3L</td><td>x ≦ a</td></tr>
</table>
</td><td>2.5</td></tr>
</table>

| NO | Item | Criterion | AQL |
|---|---|---|---|
| 07 | Cracked glass | The LCD with extensive crack is not acceptable. | 2.5 |
| 08 | Backlight elements | 8.1 Illumination source flickers when lit.<br>8.2 Spots or scratched that appear when lit must be judged. Using LCD spot, lines and contamination standards.<br>8.3 Backlight doesn’ t light or color wrong. | 0.65<br>2.5<br>0.65 |
| 09 | Bezel | 9.1 Bezel may not have rust, be deformed or have fingerprints, stains or other contamination.<br>9.2 Bezel must comply with job specifications. | 2.5<br>0.65 |
| 10 | PCB、COB | 10.1 COB seal may not have pinholes larger than 0.2mm or contamination.<br>10.2 COB seal surface may not have pinholes through to the IC.<br>10.3 The height of the COB should not exceed the height indicated in the assembly diagram.<br>10.4 There may not be more than 2mm of sealant outside the seal area on the PCB. And there should be no more than three places.<br>10.5 No oxidation or contamination PCB terminals.<br>10.6 Parts on PCB must be the same as on the production characteristic chart. There should be no wrong parts, missing parts or excess parts.<br>10.7 The jumper on the PCB should conform to the product characteristic chart.<br>10.8 If solder gets on bezel tab pads, LED pad, zebra pad or screw hold pad, make sure it is smoothed down.<br>10.9 The Scraping testing standard for Copper Coating of PCB<br><br><br>**X * Y<=2mm$^2$** | 2.5<br>2.5<br>0.65<br>2.5<br>2.5<br>0.65<br>0.65<br>2.5<br>2.5 |
| 11 | Soldering | 11.1 No un-melted solder paste may be present on the PCB.<br>11.2 No cold solder joints, missing solder connections, oxidation or icicle.<br>11.3 No residue or solder balls on PCB.<br>11.4 No short circuits in components on PCB. | 2.5<br>2.5<br>2.5<br>0.65 |

| NO | Item | Criterion | AQL |
|---|---|---|---|
| 12 | General appearance | 12.1 No oxidation, contamination, curves or, bends on interface Pin (OLB) of TCP.<br>12.2 No cracks on interface pin (OLB) of TCP.<br>12.3 No contamination, solder residue or solder balls on product.<br>12.4 The IC on the TCP may not be damaged, circuits.<br>12.5 The uppermost edge of the protective strip on the interface pin must be present or look as if it cause the interface pin to sever.<br>12.6 The residual rosin or tin oil of soldering (component or chip component) is not burned into brown or black color.<br>12.7 Sealant on top of the ITO circuit has not hardened.<br>12.8 Pin type must match type in specification sheet.<br>12.9 LCD pin loose or missing pins.<br>12.10 Product packaging must the same as specified on packaging specification sheet.<br>12.11 Product dimension and structure must conform to product specification sheet. | 2.5<br>0.65<br>2.5<br>2.5<br>2.5<br>2.5<br>2.5<br>0.65<br>0.65<br>0.65<br>0.65 |

# 16. Material List of Components for RoHs

1. WINSTAR Display Co., Ltd hereby declares that all of or part of products (with the mark "#"in code), including, but not limited to, the LCM, accessories or packages, manufactured and/or delivered to your company (including your subsidiaries and affiliated company) directly or indirectly by our company (including our subsidiaries or affiliated companies) do not intentionally contain any of the substances listed in all applicable EU directives and regulations, including the following substances.

Exhibit A：The Harmful Material List

.

| Material | (Cd) | (Pb) | (Hg) | (Cr6+) | PBBs | PBDEs |
|---|---|---|---|---|---|---|
| Limited Value | 100 ppm | 1000 ppm | 1000 ppm | 1000 ppm | 1000 ppm | 1000 ppm |
| Above limited value is set up according to RoHS. | | | | | | |

2.Process for RoHS requirement：

(1) Use the Sn/Ag/Cu soldering surface；the surface of Pb-free solder is rougher than we used before.

(2) Heat-resistance temp.：

Reflow：250℃,30 seconds Max.；

Connector soldering wave or hand soldering：320℃, 10 seconds max.

(3) Temp. curve of reflow, max. Temp.：235±5℃；

Recommended customer's soldering temp. of connector：280℃, 3 seconds.

winstar **LCM Sample Estimate Feedback Sheet**

**Module Number：** _____ **Page: 1**

**1、Panel Specification：**

1. Panel Type： ☐ Pass ☐ NG ,_____
2. View Direction： ☐ Pass ☐ NG ,_____
3. Numbers of Dots： ☐ Pass ☐ NG ,_____
4. View Area： ☐ Pass ☐ NG ,_____
5. Active Area： ☐ Pass ☐ NG ,_____
6. Operating Temperature： ☐ Pass ☐ NG ,_____
7. Storage Temperature： ☐ Pass ☐ NG ,_____
8. Others：_____

**2、Mechanical Specification：**

1. PCB Size： ☐ Pass ☐ NG ,_____
2. Frame Size： ☐ Pass ☐ NG ,_____
3. Materal of Frame： ☐ Pass ☐ NG ,_____
4. Connector Position： ☐ Pass ☐ NG ,_____
5. Fix Hole Position： ☐ Pass ☐ NG ,_____
6. Backlight Position： ☐ Pass ☐ NG ,_____
7. Thickness of PCB： ☐ Pass ☐ NG ,_____
8. Height of Frame to PCB： ☐ Pass ☐ NG ,_____
9. Height of Module： ☐ Pass ☐ NG ,_____
10. Others： ☐ Pass ☐ NG ,_____

**3、Relative Hole Size：**

1. Pitch of Connector： ☐ Pass ☐ NG ,_____
2. Hole size of Connector： ☐ Pass ☐ NG ,_____
3. Mounting Hole size： ☐ Pass ☐ NG ,_____
4. Mounting Hole Type： ☐ Pass ☐ NG ,_____
5. Others： ☐ Pass ☐ NG ,_____

**4、Backlight Specification：**

1. B/L Type： ☐ Pass ☐ NG ,_____
2. B/L Color： ☐ Pass ☐ NG ,_____
3. B/L Driving Voltage (Reference for LED Type)： ☐ Pass ☐ NG ,_____
4. B/L Driving Current： ☐ Pass ☐ NG ,_____
5. Brightness of B/L： ☐ Pass ☐ NG ,_____
6. B/L Solder Method： ☐ Pass ☐ NG ,_____
7. Others： ☐ Pass ☐ NG ,_____

>> **Go to page 2** <<

## 5、Electronic Characteristics of Module：

| | | | |
|---|---|---|---|
| 1. | Input Voltage： | ☐ Pass | ☐ NG , _____ |
| 2. | Supply Current： | ☐ Pass | ☐ NG , _____ |
| 3. | Driving Voltage for LCD： | ☐ Pass | ☐ NG , _____ |
| 4. | Contrast for LCD： | ☐ Pass | ☐ NG , _____ |
| 5. | B/L Driving Method： | ☐ Pass | ☐ NG , _____ |
| 6. | Negative Voltage Output： | ☐ Pass | ☐ NG , _____ |
| 7. | Interface Function： | ☐ Pass | ☐ NG , _____ |
| 8. | LCD Uniformity： | ☐ Pass | ☐ NG , _____ |
| 9. | ESD test： | ☐ Pass | ☐ NG , _____ |
| 10. | Others： | ☐ Pass | ☐ NG , _____ |

## 6、Summary：

**Sales signature**：_____

**Customer Signature**：_____ **Date**： / /