
COREFIX® ONE

FEATURES


- Universal wall plug for plasterboard and masonry
- Fast & easy to install
- Versatile plug knots behind plasterboard and expands in masonry
- Ideal for medium duty loads



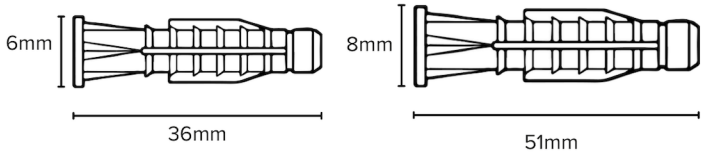



APPLICATIONS


- **Lighting fixtures**
- **Curtains**
- **Exit signs**
- **Bathroom fixtures**
- **Electrical boxes**
- **Wardrobe poles**

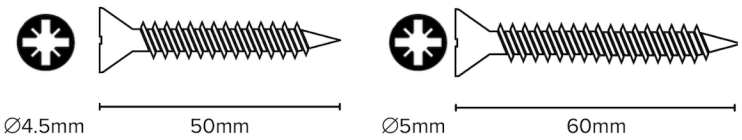

INSTRUCTIONS

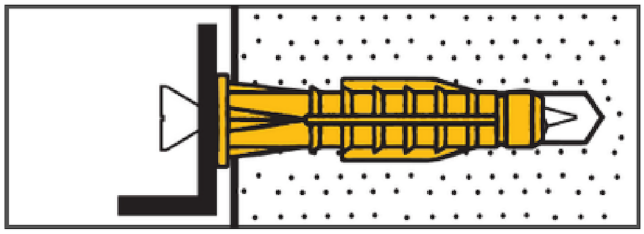

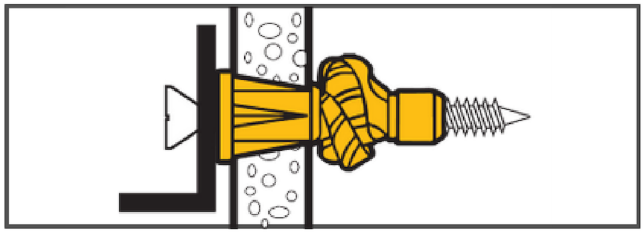

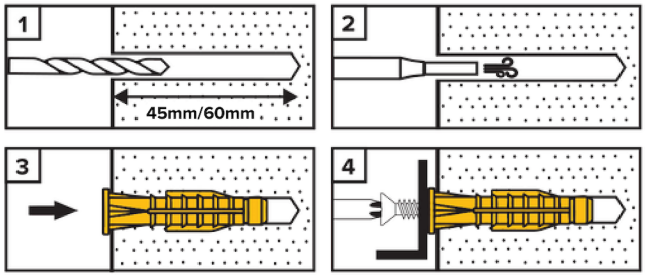

- Always check for cables and pipes before drilling and use suitable PPE.
- Independently tested on plasterboard with blockwork behind.
- Always refer to manufacturer's instructions when installing anything with Corefix and use the recommended number of fixings.

TECHNICAL DATA

	6mm plug	8mm plug
Drill diameter (masonry)	6mm	8mm
Drill diameter (plasterboard)	5.5mm	7mm
Min. hole drill depth	45mm	60mm
Screw diameter	4.5mm	5mm
Screw material	Steel	Steel
Plug length	36mm	51mm
Plug material	Plastic	Plastic
Max. fixture thickness	10mm	30mm
Safe Working Load - Concrete (Shear, single fixing)	60kg	100kg
Safe Working Load - Plasterboard (Shear, single fixing)	10kg	10kg

Notes: Factor of safety of 2. Data is for static loadings.