Code (VM, VP, VS, VPD)	Description
1218N	20A Double Pole Dual Bath/Sink Switch with Neon
1390/1391/1392/1393	20A Double Pole Switch Standard/ Neon/Flex Outlet/ Neon and Flex Outlet
1390WH/1391WH/1392WH	20A Double Pole Switch "Water Heater" Standard/Neon/Flex Outlet
1300/1300N/1301/1301N	50A Double Pole Switch Red/ Neon/Tall/Tall and Neon

Vimark Series - 20A/50A Double Pole Switch

Features

- **Vimark Pro/Square (VP/VS)**: High grade urea front plate with antimicrobial properties
- 2 earth terminals
- Captive, backed out terminal screws
- Flex outlet option available on 20A version

Safety Instructions - If in doubt, contact a qualified electrician

1. These instructions should be read carefully and retained after installation for future reference and maintenance.
2. This product should be installed in accordance with current edition of IET wiring regulations, BS 7671 and local building regulations.
3. Always switch off the mains electrical supply at the consumer unit before commencing installation.
4. **Vimark Pro/Square/Décor (VP/VS/VPD):** Use appropriate size metal, dry lining or pattress mounting boxes
5. Metal mounting boxes must be earthed and plastic grommets must be used to protect cable insulation.
6. When preparing cables, strip insulation to correct length to allow the conductors to reach the terminals.
7. Double pole switches must be earthed and earth conductor must be sleeved with green/yellow insulation sleeving.

Environmental Instructions

This product may contain substances that can be hazardous to the environment if not disposed of properly. Waste electrical and electronic equipment (WEEE) should never be disposed of with general household waste but must be separated for its correct treatment and recovery. Where possible recycle your packaging.

Installation Instructions

Wiring colours

As of April 2004, twin and earth cable core colours for all new fixed wiring installation in the UK have been updated. Refer to table below for twin and earth wiring colours identification.


	Wiring colours	
	Pre-April 2004	**Post April 2004**
Live	Red	Brown
Neutral	Black	Blue
Earth	Yellow/Green	Yellow/Green

SUGGESTED METHOD OF INSTALLATION


Read instructions and check you have all the tools and accessories to complete the installation safely and in compliance with current electrical regulations

1. Ensure the electrical supply is switched off.
2. **Vimark Pro/Square/Décor (VP/VS/VPD):** Install a metal/pattress box on a wall and route the power cable through a knockout on the box.
   Vimark Metalclad (VM): Install the 'Metalclad' backbox on the wall and route the power cable through a knockout on the box.
3. Prepare the supply and load cables by stripping the Live, Neutral and Earth wires to required length.
4. Take the new double pole switch and loosen the terminals at the back. Insert the Live, Neutral and Earth wires into their respective supply and load terminals and tighten the terminal screws. Follow diagrams on the right for typical wiring details.
5. If a metal mounting box is installed, it must be earthed; and bare earth conductors must be sleeved with green/yellow insulation sleeving.
6. **Vimark Pro/Square/Décor (VP/VS/VPD):** Screw the plate switch onto the metal/pattress box on the wall.
   Vimark Metalclad (VM): Screw the front plate onto the mounted backbox with the screws provided.
7. Switch on the power supply and check the operation.

20A Double Pole Switch

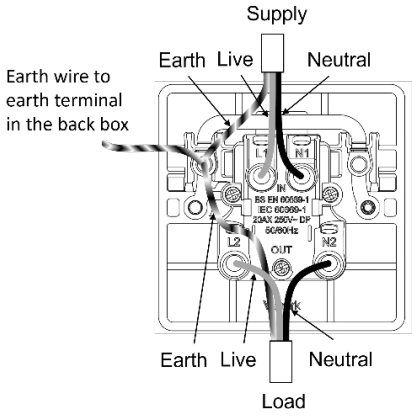

50A Double Pole Switch

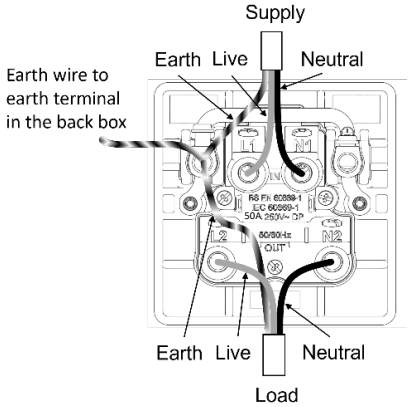

Specification

Input Voltage	250V ac 50/60Hz	Compliance		BS EN 60669-1
Current Ratings	20A 50A	Mounting Box Recommended Depth	VP/VS /VPD	20A Switch - 25mm 50A Switch - 47mm
			VM	20A Switch - 38mm 50A Switch - 38mm

Deta Electrical Company Limited
UK: Panattoni Park Luton Road Chalton Bedfordshire LU4 9TT
EU: Unit 16 Ashbourne Ind. Est. Ashbourne Co. Meath A84 W972
deta.co.uk | Technical Helpline: +44(0)1582 544 548

INS0202 V3.2 11/24 NPD 0738/0774/0777/0841