
USB-C Female-Male FEEDTHROUGH CONNECTOR



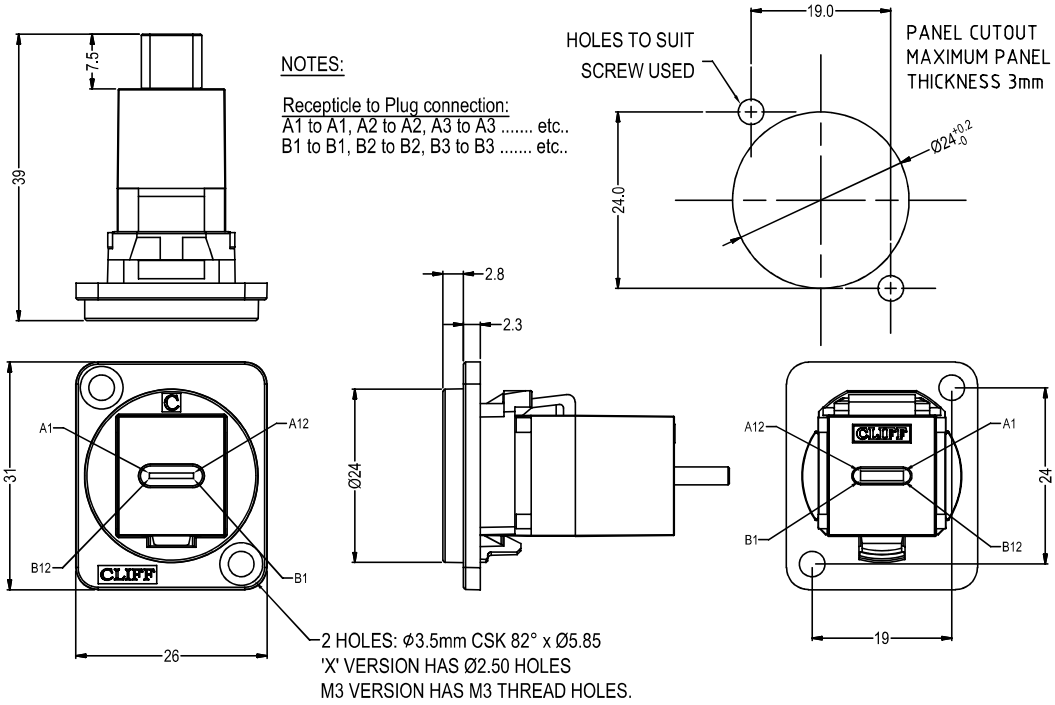

Feedthrough Features

- Fits standard XLR Ø24mm cutout.
- No soldering or punch termination. Use standard cable for each connector style.
- Front or rear mounted.
- Low rear profile

General:
Please note: Functionality is affected by cable quality, length and cable wiring configuration.

VARIANTS

Part No.	
CP30211	USB-C F-M Black plastic frame, CSK holes
CP30211W	USB-C F-M White plastic frame, CSK holes
CP30211M	USB-C F-M Nickel plated metal frame, CSK holes
CP30211M3	USB-C F-M Nickel plated metal frame, M3 holes
CP30211MB	USB-C F-M Black metal frame, CSK holes
CP30211M3B	USB-C F-M Black metal frame, M3 holes
CP30211X	USB-C F-M Black plastic frame, PLAIN holes
CP30211XW	USB-C F-M White plastic frame, PLAIN holes

Material:
1. Insert: ABS - UL94 HB
2. Plastic Frame: Polyamide UL94 V-2
3. Metal Frame: Diecast, Black or Nickel plated

USB-C Specification:
Maximum Rated Current - 3A
Maximum Working Voltage - 30V
Withstanding Voltage - 100V for 1 minute.
Contact Resistance - 40 Milli-ohms Max.
Insulation Resistance - 100 Mega-ohms Min.
Insulator Flammability Rating - UL-94V0
Insertion Life - 10,000 Cycles.

© CLIFF 06/2021 ISS.2

For further information, contact sales@cliffuk.co.uk

Cliff Electronic Components Limited,
76 Holmethorpe Avenue, Holmethorpe Ind. Estate,
Redhill, Surrey RH1 2PF U.K.
Tel: +44 (0)1737 771375 Fax: +44 (0)1737 766012

RoHS

Visit us online at:
www.cliffuk.co.uk