KAUDEN™

Item code SM317
CAT6A IDC Shielded Cable Coupler





- Enables the Joining of two shielded CAT6A RJ45 Cables
- 4 pair Insulation Displacement Connection terminals
- Used for joining CAT6A solid core cables
- With cable ties and stick pad to attach to surface
- Earth Clamp enables drain wire attachment


Frequently used in ceiling installations . Enabling the easy joining of CAT6A specification cables . Requires the use of IDC punch down tool. As the device is made to CAT6A specifications it is backwards compatible with CAT5 and CAT6 and can be used on non-shielded wires. We recommend this is only used with solid copper cable 23-24 AWG


General


Sale Unit	Single unit. Polybag with barcode
Barcode	5028088012130
Commodity Code	85444290
Dimension Packed	105x75x25mm Height Width Depth
Dimension loose	25x25x48mm Height Width Depth
Weight Packed	0.024 grams
Weight Loose	0.023 grams

Outer Carton information for Trade and Bulk buyers

Carton Quantity	20
Dimension	7x14x15cm
Weight	0.514 Kg

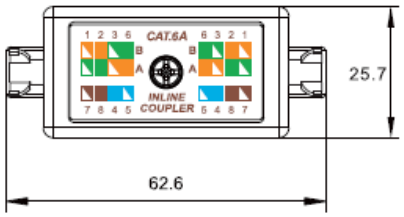

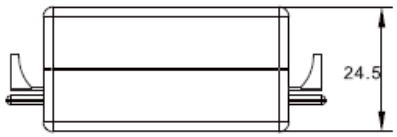



Specification:
Material:

1. Housing:ABS,
2.IDC House: PC,
3.IDC Terminal material & finished:
3-1:Phosphor Bronze with 50" Tin-Lead plated.
over 50-60"Nickel plaed.
3-2.KR tool compatible.
3-3.Use for 23-24AWG stranded and solid wire.

Performance:
a.Operation Temperaure:-10℃ to 60℃
b.Durability:
b-1.IDC:Max.200 punching times.
c.The Cat.6A performance is in compliance with the ANSI-TIA/EIA-568. 2-D standerd.