
ECPD- 30/60 Series

30 & 60 Watt Type C USB PD Power Muilti-head Range

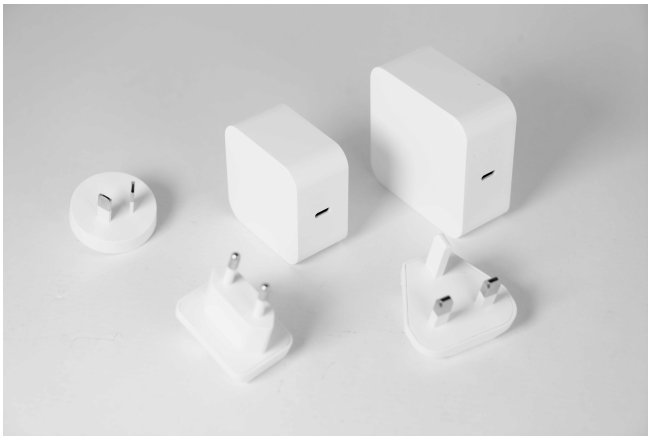

Features:

- USB C Socket
- UK, EU and US Switchable AC Heads
- Energy Efficiency Level VI
- Protections: Short circuit & Over current
- Universal Input 90 – 264VAC
- Approvals: UL/CUL, GS, TUV, UKCA

Models

	ECPD-30	ECPD-60
Output Specifications		
Output Voltage	5V/9V/12V/15V/20V	5V/9V/12V/15V/20V
Output Regulation	±5%	
Output Current	3A/3A/2.5A/2A/1.5A	3A/3A/3A/3A/3A
Rated Power	30W	60W
Ripple & Noise	100mVp-p Max	300mVp-p Max
Output Connector	USB C Socket	
Input Specifications		
Input Voltage	90-264VAC	
Frequency Range	50-60Hz	
Standby Power	0.1W Max	
Leakage Current	0.25A Max	
Input Current	0.8A Max	1.3A Max
Inrush Current	40A Max	
Input Connector	UK,EU & US AC Heads	
Environment		
Operating Temp	-0°C-40°C	
Cooling	Convection	
Temperature Coefficient	-0.05%/°C	
Humidity	5~95%RH (non-condensing)	
Storage Temp	-20°C+60°C	

Ecopac (UK) Power Ltd
Unit 4, Ridgeway, Crendon Industrial Area
Long Crendon, Bucks, HP18 9BF

www.ecopacpower.co.uk
Tel: +44 (0) 1844 204420
Email: enquiry@ecopacpower.co.uk

ECPD- 30/60 Series

30 & 60 Watt Type C USB PD Power Muilti-head Range

Safety & EMC


Safety standards	UL/CUL 62368-1, GS/TUV EN62368-1
EMC Emissions	EN55032, FCC Part 15 Class B

Other Specifications


Size Dimensions	53x 53x 28 mm	65.5x 65.5x 29 mm
Carton Quantity	100	100
Weight	0.35Kg	0.55Kg

Mechanical Specifications

ECPD-30

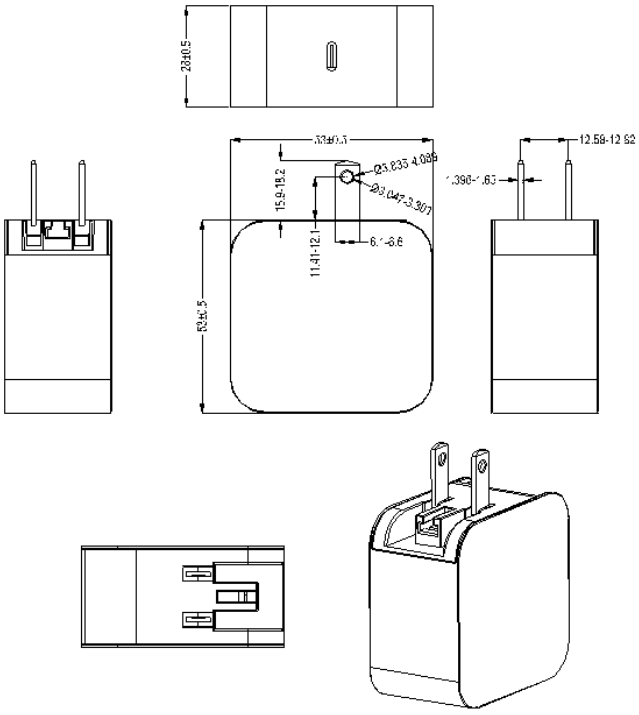

ECPD-60

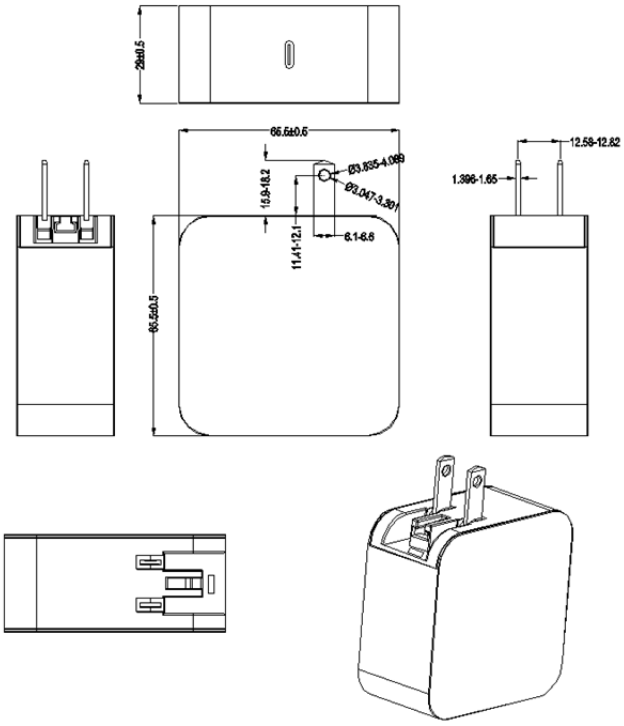

Ecopac (UK) Power Ltd
Unit 4, Ridgeway, Crendon Industrial Area
Long Crendon, Bucks, HP18 9BF

www.ecopacpower.co.uk
Tel: +44 (0) 1844 204420
Email: enquiry@ecopacpower.co.uk