EuroTec
INTERNATIONAL PLC

Tel: 44 (0) 1420 538500 Fax: 44 (0) 1420 538111
Email: info@eurotec-intl.co.uk

745-601

5" Bass/mid Loudspeaker

- Semi-press paper cone
- Roll edge rubber surround - low damping
- 45 Watt RMS power handling
- Closed cell continuous foam gasket
- High efficiency/sensitivity

59-F135.03-01F

Technical Specification:

Magnet Ø	90	*mm*
Nominal Impedance	8	*Ohms*
Output S.P.L 1W @ 1m	91 ± 2	*dB*
Frequency Response	67 - 7500	*Hz*
Rated Power Input	45	*Watts rms*
Voice coil Ø	25	*mm*
Mounting depth (from rear)	60	*mm*
Speaker weight	890	*g*

After the following tests the speaker operates normally

Load test: 45 Watts of White noise for 24 Hrs

Heat test: 70 ± 2°C for 16 Hrs

Humidity test: 40 ± 2°C for 96 Hrs @ 90% R.H.


Theile Small Parameters:

Fs	59	*Hz*
Re	6.5	*Ohms*
Res	29	*Ohms*
Qms	3.00	
Qes	0.68	
Vas(Sd)	11.7	*Litres*
Mms	7.15	*grams*
Cms	1029	*µm/Newton*
Bl	5	*Tesla-m*

Remarks:

Supplied as standard with Faston® terminals as follows:

+Ve 2 x 4.8mm x 0.8mm
-Ve 2 x 2.8mm x 0.8mm

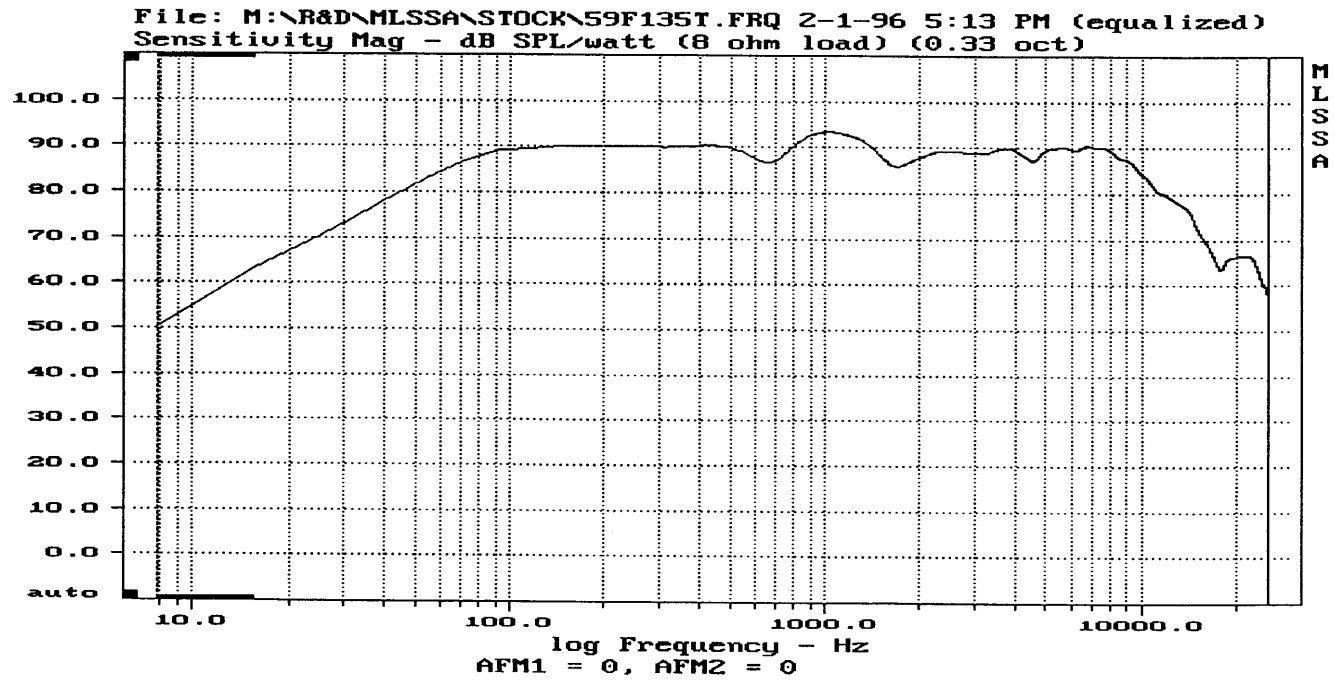

FROM EUROTEC

No	
作年月日	

