ECPE12 Range

12 Watt UK Plug Top




Features :

- **UK Plug Top**
- **DOE Level VI Efficiency**
- **Overcurrent Protection**
- **Short Circuit Protection**
- **RoHs Compliant**
- **1 Year Warranty**
- **EN62368 Approved**

Model		ECPE-12-05U	ECPE-12-09U	ECPE-12-12U	ECPE-12-24U
Output	DC Voltage	5vdc	9vdc	12vdc	24vdc
	Rated Current	2amp	1.33amp	1amp	0.50amp
	Current Range	0-2amp	0-1.33amp	0-1amp	0-0.50amp
	Rated Power	12Watt	12 Watt	12 Watt	12 Watt
	Ripple & Noise	200mVp-p max	200mVp-p max	200mVp-p max	200mVp-p max
	Output Regulation	±5%	±5%	±5%	±5%
	Output Connector	2.1x5.5x12mm C+ve	2.1x5.5x12mm C+ve	2.1x5.5x12mm C+ve	2.1x5.5x12mm C+ve
Input	Voltage Range	90-264vac	90-264vac	90-264vac	90-264vac
	Frequency Range	47-63Hz	47-63Hz	47-63Hz	47-63Hz
	Input Current	1.2amp Max	1.2amp Max	1.2amp Max	1.2amp Max
	Inrush Current	40amp Max	40amp Max	40amp Max	40amp Max
	Standy Power	0.1W Max	0.1W Max	0.1W Max	0.1W Max
	Leakage Current	0.25amp Max	0.25amp Max	0.25amp Max	0.25amp Max
	Input Connector	UK	UK	UK	UK
Environment	Operating Temp	0°C~40°C	0°C~40°C	0°C~40°C	0°C~40°C
	Cooling	Convection	Convection	Convection	Convection
	Temperature Coefficient	0.05%/°C	0.05%/°C	0.05%/°C	0.05%/°C
	Humidity	5~95%RH(non-condensing)	5~95%RH(non-condensing)	5~95%RH(non-condensing)	5~95%RH(non-condensing)
	Storage Temp	-20°C~+80%°C	-20°C~+80%°C	-20°C~+80%°C	-20°C~+80%°C
Safety & EMC	Safety Standards	CE EN62368-1			
	EMC Emissions	EN55032,EN55035, EN61000-3-2 2014, EN61000-3-3 2013			

Mechanical Specification

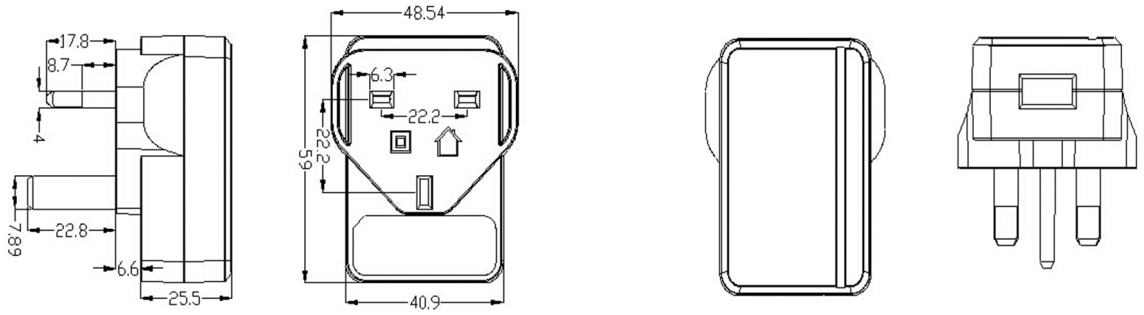

Ecopac UK Power Ltd
Unit 4 Ridgeway
Crendon Industrial Area
Long Crendon
Buckinghamshire, HP18 9BF

www.ecopacpower.co.uk
Tel: +44 (0) 1844 204420
email :enquiry@ecopacpower.co.uk