
Specifications	ABT-402-RC
Rated voltage (Vp-p square wave)	5Vp-p
Operating voltage	1~20Vp-p
Rated current at rated voltage	1mA
Capacitance	13000±30%pF
Sound output at 4,000Hz at 10cm	≥80dB
Resonant frequency	4000±500Hz
Operating temperature	-20~+70°C
Storage temperature	-30~+80°C
Weight	1g

Requires additional electronic circuitry to operate as a sounder

Features

- ROHS compliant
- Low power consumption
- Wave solderable and washable
- PCB mountable
- Sealed base

All data at 25°C unless otherwise specified

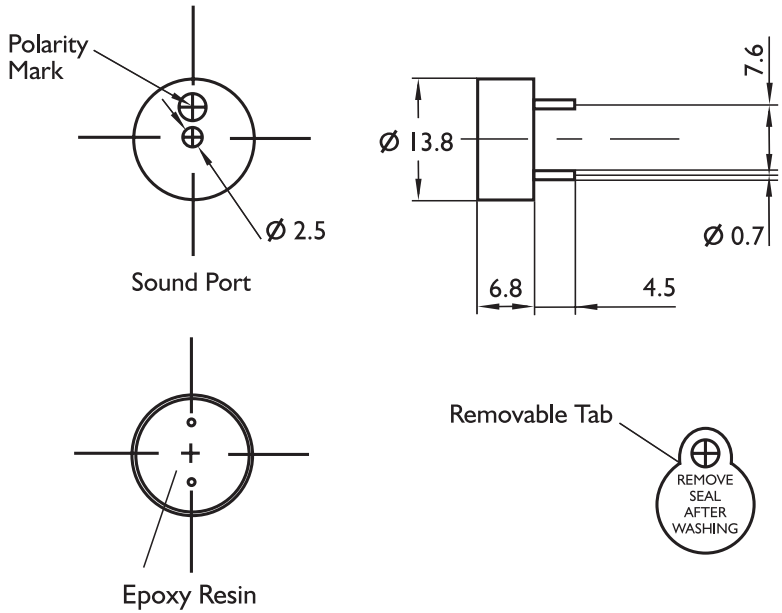

Dimensions Unit: mm Tolerance: ±0.5mm

ALAN BUTCHER COMPONENTS LTD

Alan Butcher Components Ltd
Unit 1 Beechwood Clump Farm Industrial Estate Tin Pot Lane Blandford Dorset DT11 7TD
Telephone 01258 456360 **Facsimile** 01258 459194 **Email** sales@abcomponents.co.uk
www.abcomponents.co.uk