XLR type Category 6A STP Black Fronted Socket:



XLR type Category 6A STP Black Fronted Socket (SGDpmbk)

This die-cast, ruggedised XLR style STP socket is built to be used in a wide range of challenging environments. Using the industry standard, XLR latch-locking mechanism, it offers a secure connection that comfortably performs to Cat6A. Designed to be easily mounted into XLR style cut-outs, this high quality jack boasts tool-less “butterfly style” levers which enable quick and easy terminations.

Features:

- STP socket with dual 568 A/B wiring
- Compliant with:
  - IEEE standard for PoE+ and 4PPoE IEEE 802.3
  - Standard for high performance shielded 8 way connectors IEC 60603-7-51
  - Category 6A standard for Balanced Twisted-Pair Components TIA-568.2-D
  - Standard for generic premise cabling to Class EA/Cat 6A ISO/IEC 11801-1
- Fully shielded, die-cast body offers a durable, sturdy design with outstanding performance in eliminating alien cross-talk
- Industry standard XLR latch-locking mechanism
- Please note: Not suitable for use with 6p4c (RJ11 type) or 6p6c (RJ12 type) plugs
- Not compatible with Neutrik male connector NE8MC6-MO and NKE6S* cables.

Specifications:

- Net weight (including primary packaging): 44g
- Dimensions: 26.18 x 31.18 x 41.38 mm approx.

TUK Ltd, Unit 4, Wimbledon Stadium Business Centre, Riverside Road, London SW17 0BA

Tel: 020 8946 6688 Fax: 020 8879 7410 E-mail: sales@tuk.co.uk Website: www.tuk.co.uk

- Colour: Silver with Black front

- Materials:
  - Internal connector: Impact resistant, UV stabilised ABS+PC 94V0 plastic
  - Housing: Nickel-plated zinc alloy
  - Contact plating: 50µ”/1.27µm gold over contact area

- Operating temperature: -40˚C to 66˚C

- Supplied with cable tie

- Plug insertion tested to over 750 times

- Suitable for 22 ~ 26 AWG solid wire, core diameter: 0.6mm ~ 1.52mm, cable OD: 6mm ~ 8.5mm


Packaging: Packed in individual polybags with instructions printed on bag, then in bags of 20.

Commodity code: 85444920

EAN: 5055386510099

Country of Origin: China



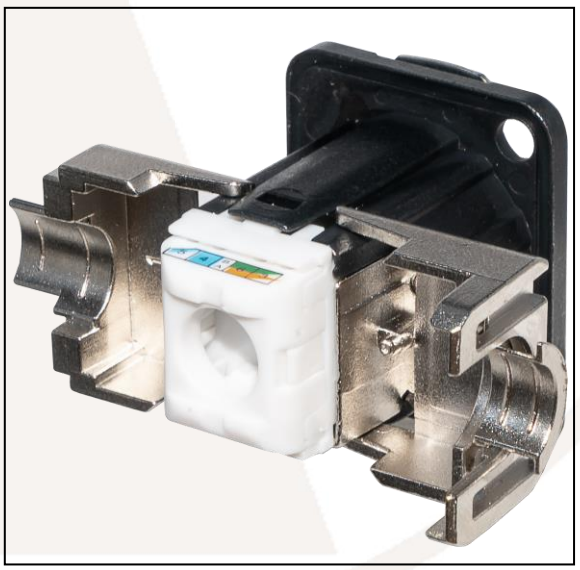


12/01/2023


TUK Ltd, Unit 4, Wimbledon Stadium Business Centre, Riverside Road, London SW17 0BA


Tel: 020 8946 6688 Fax: 020 8879 7410 E-mail: sales@tuk.co.uk Website: www.tuk.co.uk


ROHS Compliant


Code: SGDpm
SGDpmbk

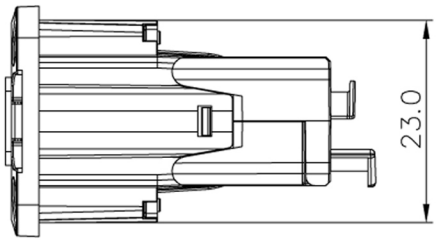





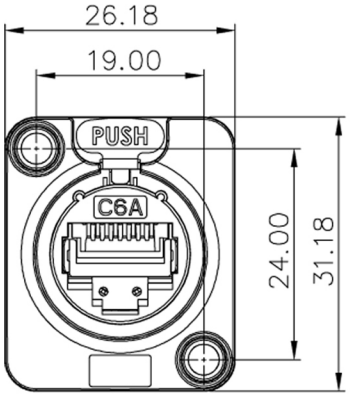

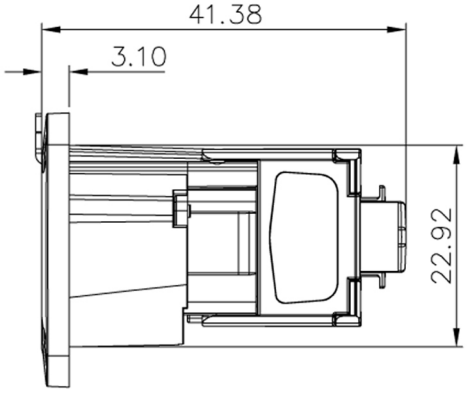





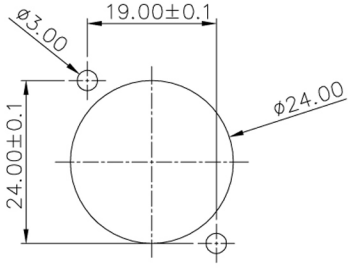

Panel cut out

MECHANICAL

(1) Materials: Impact-resistant,UV stabilized ABS+PC 94V0 plastic

(2) Zn alloy+Nickel Plated

Caution:

Please do not connect this Socket with RJ11 cable/plug

UNIT	mm
SCALE	1:1

TUK Ltd, Unit 4, Wimbledon Stadium Business Centre, Riverside Road, London, SW17 0BA

16/01/2023

Tel: 020 8946 6688 Fax: 020 8879 7410 Email: sales@tuk.co.uk Website: www.tuk.co.uk