
Low Profile Category 5e 6C Outlet:

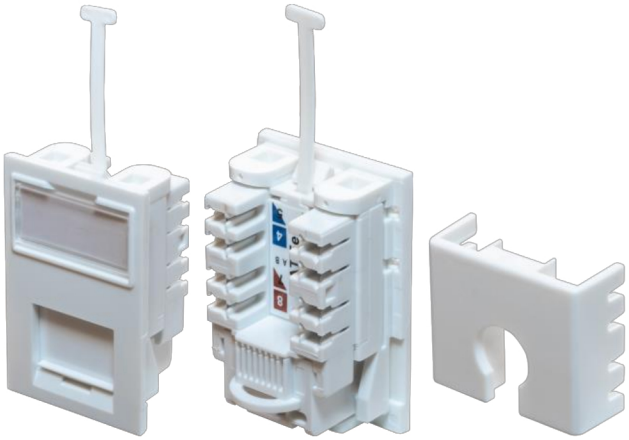

Low Profile Category 5e 6C Outlet (FJ6whje, FJ6whje#24):
This affordable outlet which easily performs to Category 5e TIA/EIA-568-C.2 at permanent link, can be quickly and easily terminated and fits most standard 6C faceplates

Features:

- Performs to Category 5e at permanent link level with good headroom
- Low profile design, shuttered front aperture protects against dust
- Fitted with industry standard Krone (LSA+) type IDC connections
- Compatible with most '6C' style faceplates
- 'Slip-in' label facility for port identification
- Integral cable tie point. Cable retention clip also supplied along with additional flexible cable tie facility
- Available in individual polythene bags or in 'bulk packs' of 24 without individual poly bags

Specifications:

- Weight:
  FJ6whje: 12g FJ6whje#24: 300g
- Dimensions (as packed):
  FJ6whje: 40 x 50 x 20mm FJ6whje#24: 240 x 225 x 30mm
- Colour: White (RAL 9003)

- Materials:
  IDC:
  IDC cap: ABS, UL 94-HB IDC
  Housing: PC + Glass fibre UL 94V-2 IDC
  Terminal: Tin plated phosphor bronze

  RJ45 Jack:
  Housing: ABS UL 94-HB
  Contact bracket: PC 1250Y, UL 94V-0

  RJ45 Jack Contact
  Material: Nickel plated phosphor bronze
  Finish: 50µ"/1.27 µm gold plating on plug contact area

- T568A and T568B wiring sticker
- Insertion force: 20N max.
- Retention strength: 7.7kg between jack and plug
- Operating temperature: -10˚C to 60˚C
- Suitable for 22-26 AWG stranded and solid wire with Krone (LSA+) type punch down tool

Packaging:
FJ6jewh: individually bagged, then bagged in 20s then in 100s
FJ6jewh#24: in box of 24 pcs, then in outer carton of 24 boxes

Commodity code: 84733020

EAN: FJ6whje: 5055386510594 FJ6whje#24: 5055386510600

Country of Origin: China