
# DUALSLIM CAT.6 RJ45 RIGHT ANGLE FEEDTHROUGH CONNECTOR

Can be front or rear mounted in the panel



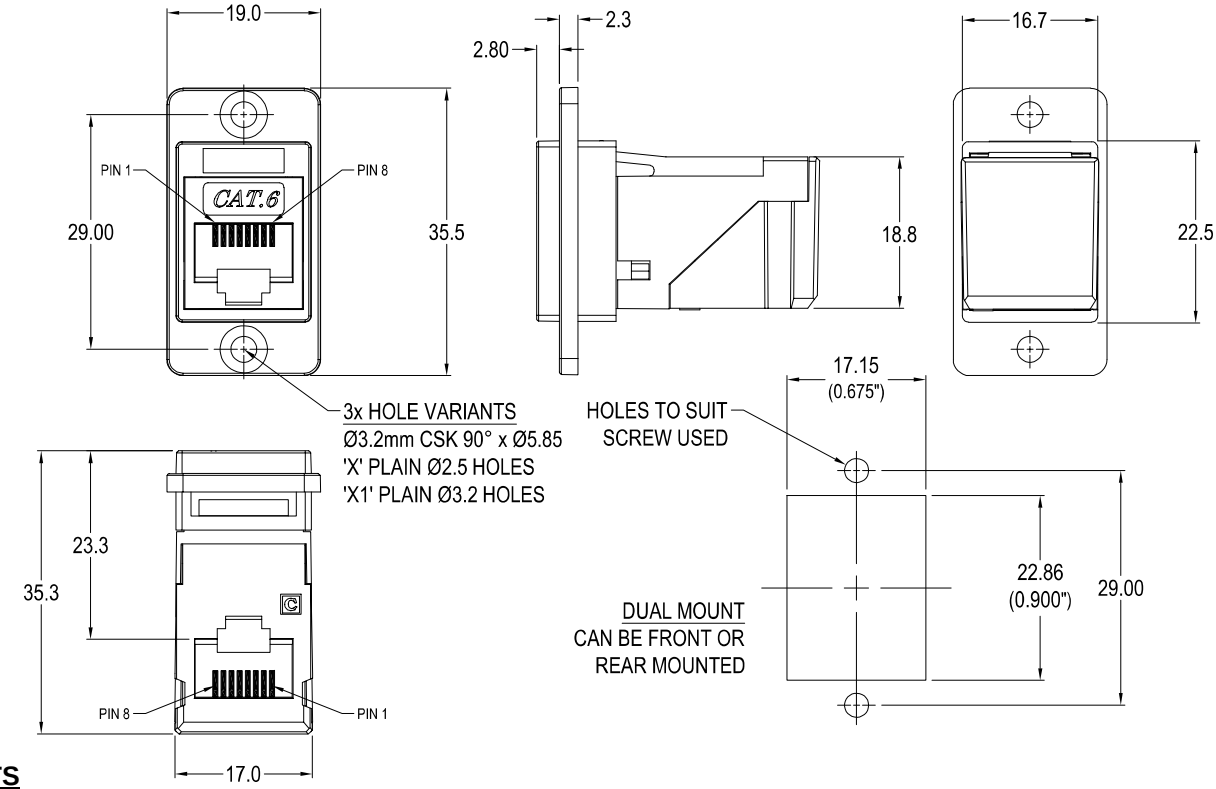


**VARIANTS**

| Part No. | |
|---|---|
| **CP30752** | RAFT DUALSLIM Cat.6 RJ45 Black plastic frame, CSK holes |
| **CP30752X** | RAFT DUALSLIM Cat.6 RJ45 Black plastic frame, Ø2.5 PLAIN holes |
| **CP30752X1** | RAFT DUALSLIM Cat.6 RJ45 Black plastic frame, Ø3.2 PLAIN holes |

Feedthrough Features

- Fits standard rectangular cutout.
- Front or rear mounting through the panel.
- Various hole mounting options.
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile.
- 90° or right angle rear cable entry.

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Material:

1. RJ45 In-Line Coupler: ABS UL94-V2
2. RJ45 In-Line Coupler Contact: Phosphor Bronze, gold plating.
3. PCB: FR4
4. Frame: Polyamide UL94-V2

Performance:

1. T568A & T568B wiring.
2. Meet ISO/IEC 11801 and EN50173
3. Meet ANSI/TIA/EIA 568B.2
4. Rating: 125VAC RMS 1.5A
5. Operating Temperatures: Min -10°C Max +60°C

For further information, contact sales@cliffuk.co.uk

© CLIFF 07/2022 ISS.1

**Cliff Electronic Components Limited**,
76 Holmethorpe Avenue, Holmethorpe Ind. Estate,
Redhill, Surrey RH1 2PF U.K.
Tel: +44 (0)1737 771375 Fax: +44 (0)1737 766012

Visit us online at:
www.cliffuk.co.uk