


CLIFF

USB-C F-M RIGHT ANGLE FEEDTHROUGH CONNECTOR (RAFT)



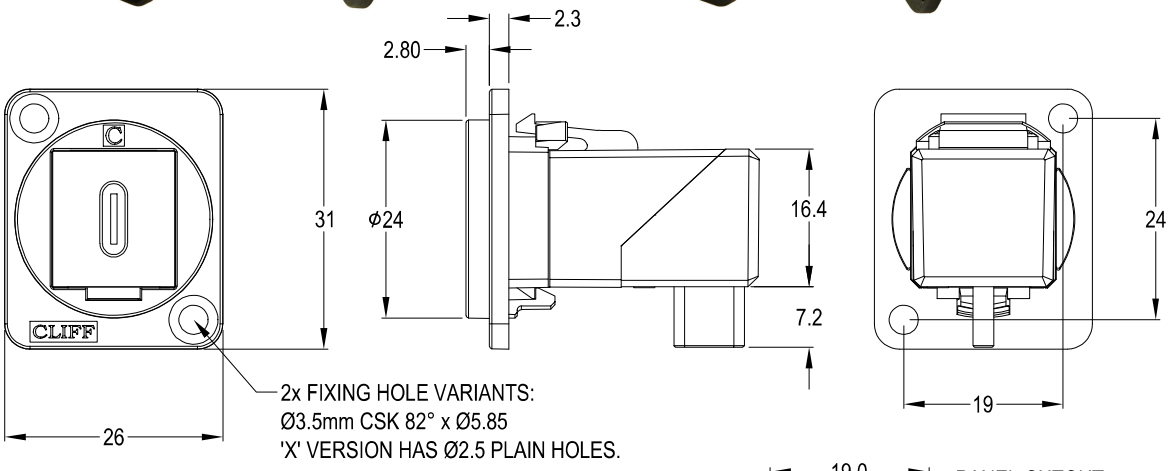

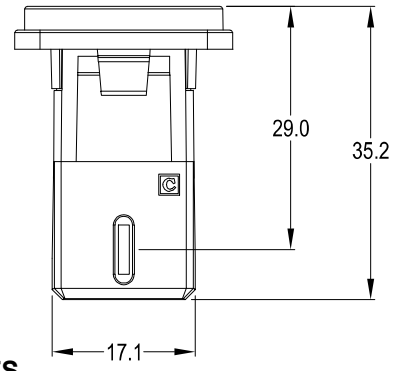

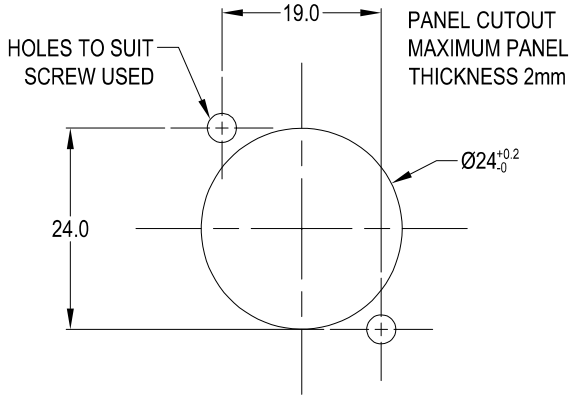

VARIANTS

Part No.

CP30256 RAFT USB-C F-M Black plastic frame, CSK holes

CP30256X RAFT USB-C F-M Black plastic frame, 2.5mm PLAIN

Receptacle to Plug connection:
A1 to A1, A2 to A2, A3 to A3 ..... etc..
B1 to B1, B2 to B2, B3 to B3 ..... etc..

Feedthrough Features

- Fits standard XLR Ø24mm cutout.
- No soldering or punch termination. Use standard cable for each connector style.
- Front or rear mounted.
- Low rear profile
- 90° or right angle rear cable entry.

General:
Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Materials:
Frame: PA66, UL94 V-2
RAFT Insert: ABS, UL94 HB
USBC Insulator: LCP, UL94 V-0

USB-C (3.1) Specification:
Maximum Rated Current - 3A
Maximum Working Voltage - 30V
Dielectric Withstanding Voltage - 100VAC (min) 1 minute
Contact Resistance - 40mΩ maximum
Insulation Resistance - 100 MΩ minimum @100V DC
Insertion Life - 10,000 Cycles
Power Delivery (PD) Compatible - Yes

© CLIFF 08/2023 ISS.1

For further information, contact sales@cliffuk.co.uk

Cliff Electronic Components Limited,
76 Holmethorpe Avenue, Holmethorpe Ind. Estate,
Redhill, Surrey RH1 2PF U.K.
Tel: +44 (0)1737 771375 Fax: +44 (0)1737 766012

Visit us online at:
www.cliffuk.co.uk