
GEN II LEVER WIRE CONNECTORS

The IDEAL Lever connectors utilise the latest connection technologies and can accommodate multiple wires of different types of sizes.

It offers a fast, simple and cost-effective alternative to terminal blocks allowing electrical professionals to save time and money on site while achieving easier, more consistent terminations for wires up to 4mm² (12AWG) and 32 Amps.



- For use in all applications up to 32A including lighting, access control, radial and final ring circuits
- Releasable connector – for solid, stranded and flexible wires
- Innovative levers – opens in the opposite direction of insertion points
- Compact design – suits tight spaces.
- Easy to use - no need to lift the levers when using on solid wire
- Continuity check port - for testing
- Clear shell - allows for verification of connection
- Secure your cables in seconds – no screwdriwer, no crimping, just strip, push, connect
- Wire clamping range - 0.2 mm² to 4.0 mm² (24 - 12 AWG for solid and rigid stranded wires (7 strands) and 0.14 mm² to 4.0 mm² (24 - 12 AWG) for flexible wires
- BS 7671:2008 (18th Edition), IEC 60998 and UL 486C compliant
- CE, UKCA, UL and ENEC approved

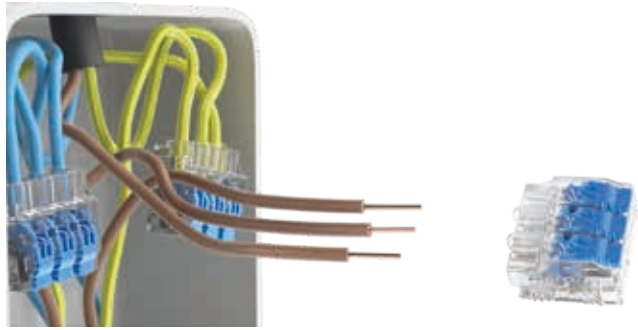

Ports	Quantity	Cat. No.
2	Bag of 10	**30-0092-10**
	Bag of 30	**30-0092-30**
	Box of 40	**30-0092**
3	Bag of 10	**30-0093-10**
	Bag of 30	**30-0093-30**
	Box of 40	**30-0093**
5	Box of 30	**30-0095**
Mixed Bag	10 x 2 port 10 x 3 port 10 x 5 port	**30-0099-B**
Mixed Box		**30-0099**



For kits, please see page 9

Specifications

		Model L2 2 port	Model L3 3 port	Model L5 5 port
Rating	IEC 60998	32 Amp / 450V / 85˚C (ambient)		
	UL 486C	600V / 105˚C (working)		
Depth		18.6 mm		
Width		13.3 mm	18.9 mm	30.4 mm
Height		8.8 mm		
Wire Combination Range	Solid and Rigid Stranded	0.2mm²-4.0mm² /24-12 AWG		
	Flexible Wires	0.14mm²-4.0m² /24-12 AWG		

LISTED Cu/Cu Only UKCA CE