
EVSG-ORD 50 LG

Stop end with mounted O-Ring, polyamide, RAL 7035, M50





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

RoHS

Material	Polyamide, fibre reinforced
Material sealing gasket	EPDM
Temp. range min	-40 °C
Temp. range max	100 °C
Glow wire test	650 °C
Protection class	IP66 / IP68 (5 bar 30 min)
Thread type	M
Ø Connection thread D	50
Lead	1,5
Length screw-in thread L	10 mm
Total length TL	15 mm
External diameter ED	56 mm
Product Color	RAL 7035
Order no. RAL 7035	10064640
Type	EVSG-ORD 50 LG
Packing unit	50
EAN number	4007685646406
Tariff number	39269097
ETIM-Classification	EC000032


Recommended accessories

EMUG 50 LG	10060776

02.09.2025

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

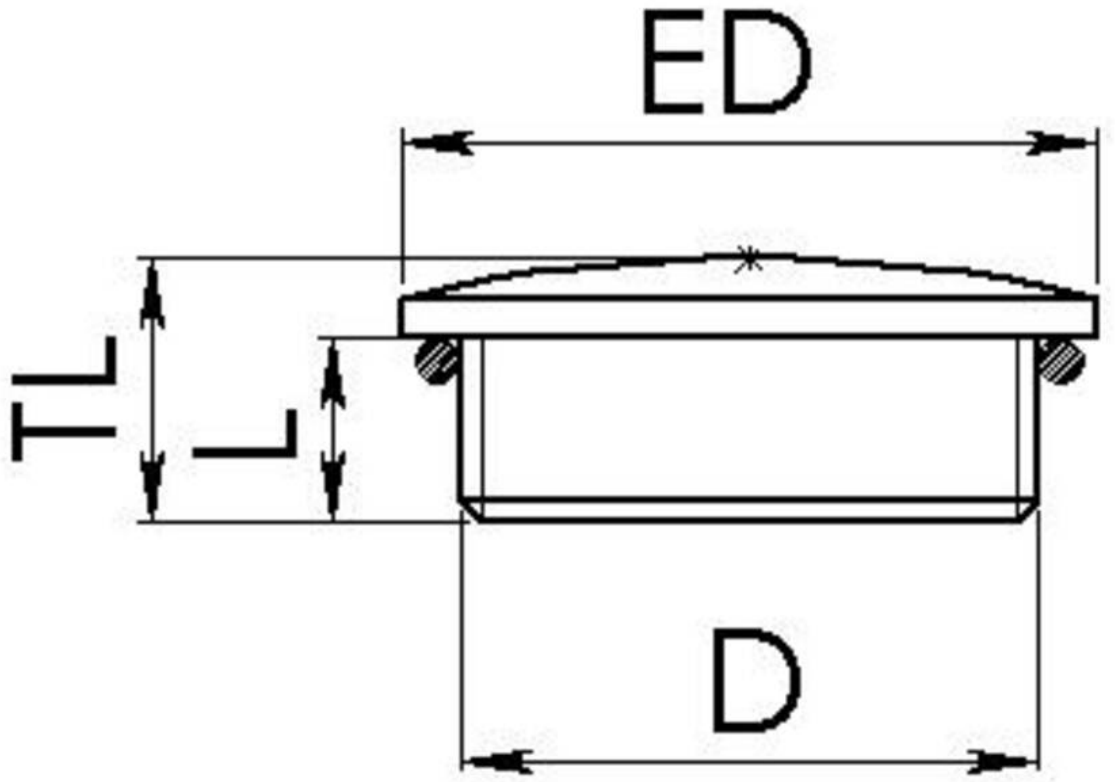

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice