Concordia Technologies
CABLING ACCESSORIES




Chassis Cable Ties

Product Details:
Material Natural: Polyamide 6.6 natural, heat stabilised
Material Black: Polyamide 6.6 heat stabilised with carbon black
Flammability of raw material : UL 94 - V2
Humidity absorption: 2,4% (23° C - 50% R.H.)
Installation temperature: -20° C ÷ +115° C
Working temperature: -40° C ÷ +115° C
Max sustainable temperature for short time: +130°C
Carbon black addiction gives a better UV resistance
Halogen Free

Standards:
RoHS, Reach, PAHs Compliance

Application:
Good resistance to bases, oils, greases, oil derivates, chloride solvents. Limited resistance to acids. Not resistant to phenols.

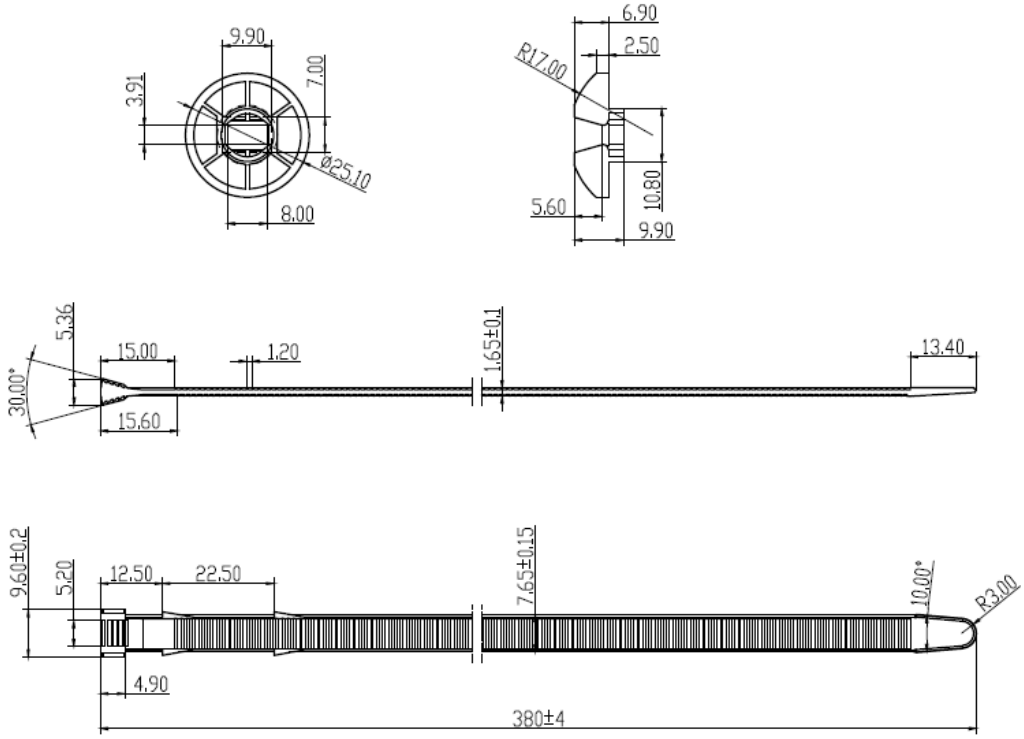

Part No.	Size	Max.Bundle	Min.Bundle	Tensile Strength	Pack Size
ACCT370X7.6B	370X7.6	103.5mm(4.07")	8.5mm(0.33")	540N(120lb)	100

This data sheet remains the property and copyright of C & C Cables Limited and the information contained within this document must not be copied or reproduced without the permission, in writing, from C & C Cables Limited. All information contained within this data sheet was correct at time of creation but may be subject to change without prior notice.

C & C Cables Limited Unit 1 & 2 Cotton Hall Mill, Cotton Hall Street, Darwen, BB3 0DW, UK