ISO 9001 CERTIFIED

DNH


*HEAD OFFICE, NORWAY*
**DNH AS**
Phone..... + 47 35 98 56 00
Fax..... + 47 35 98 56 10
E-mail..... dnh@dnh.no
**Web-Site..... www.dnh.no**


*ENGLAND*
**DNH WW Ltd**
Phone..... + 44 1908 275 000
Fax..... + 44 1908 275 100
E-mail..... dnh@dnh.co.uk


*GERMANY*
**DNH GmbH**
Phone... + 49 040 6569 30-0
Fax..... + 49 040 6569 30-30
E-mail..... dnh@dnh.de

*USA*
**DNH Speakers Inc**
Phone..... + 1 484 494 5790
Fax..... + 1 484 494 5793
E-mail..dnh@dnhspeakers.com


# BIVEP-6(T)




1xM20 blinding plug
1xM20 gland

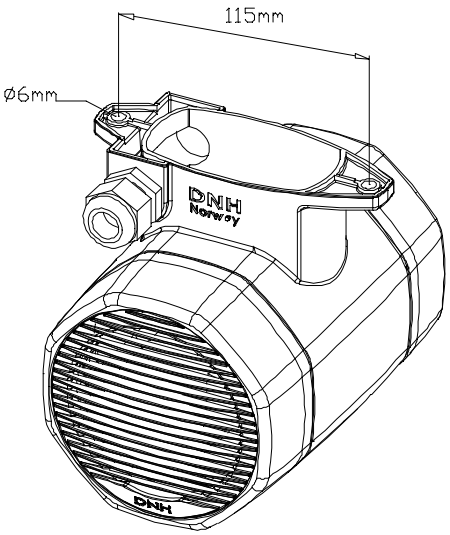



| 70/100 Volt combined transformer Primary connections | |
|---|---|
| White : Green | 70 V |
| White : Red | 100 V |
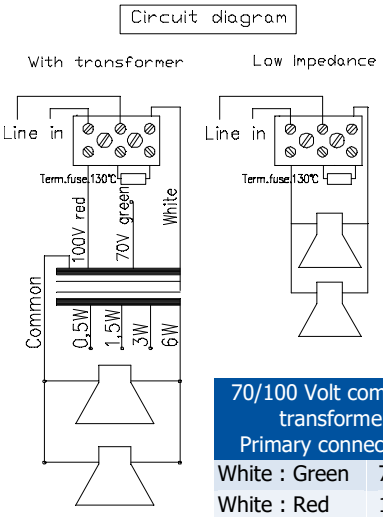
| Secondary nominal tappings | |
|---|---|
| C : 6 | 6,0 W |
| C : 3 | 3,0 W |
| C : 1,5 | 1,5 W |
| C : 0,5 | 0,5 W |

## Sound pressure levels at 1W/1m w/P-3/10T same phase

SPL vs Freq

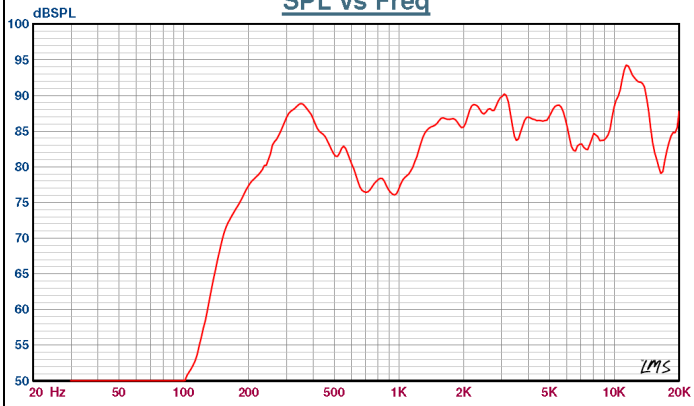


| Specifications | |
|---|---|
| Material / Color | ABS / RAL 7035 |
| Mounting | Foot bracket |
| Termination | Ceramic screw terminals |
| Weight w/transformer | 0,94 kg |
| IP-rating | 44 |
| Max. / min. amb. temp | 90°C / -40°C |
| Rated power | 6W |
| SPL 1W/1m | 87 dB |
| SPL rated power | 94 dB |
| Effective freq. range | 150 – 20000 Hz |
| Dispersion (-6dB) 1kHz / 4kHz | 360° / 2x70°(bidirectional) |
| Directivity factor, Q1kHz/4kHz | 1 / 5,1 |
| Options | Impedances, colors, labels |

## Installation, Operation and Maintenance Procedures

- Fasten the loudspeaker to the wall by two screws.
- To open the loudspeaker, turn the front gently counterclockwise and pull.
- Lead cable through cable gland, connect to fused ceramic terminal and select required tapping into the transformer.
- If 70V, replace red cable with the green cable in the terminal.
- Close the loudspeaker turning the front gently clockwise until it stops.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with two years warranty against defective workmanship.

CE

DNH reserves the right to alter specifications without notice.