


NOTE:


1. MATERIAL
   - 1.1 CABLE: 32AWG (7/0.08CU±0.008)*4P+PVC JACKET OD:(6.0*1.6)±0.2
   - 1.2 CONNECTER: RJ45(8P8C)MALE TYPE:
     INSULATION: CLEAR POLYESTER,
     CONTACTS:BRASS,GOLD PLATED G/F'
   - 1.3 PVC MOLDING: PVC
   - 1.4 ALL COMPONENTS ARE RoHS COMPLIANT.
2. ELECTRICAL
   - 2.1 100% OPEN AND SHORT TEST

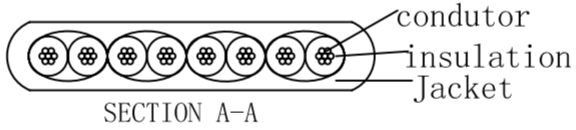

SECTION A-A

PIN OUT

CN1	CN2	COLOR
1	1	WHITE
2	2	ORANGE
3	3	WHITE
6	6	GREEN
4	4	BLUE
5	5	WHITE
7	7	WHITE
8	8	BROWN



Length	Tolerance
≤1000mm	±30mm
1000<L≤5000mm	±50mm
5000<L≤10000mm	±100mm
10000<L≤20000mm	±200mm
20000mm<L	±500mm

REV.	DESCRIPTION	DATE
00	DESCRIPTION	2016-11-04

Tolerance: X. ±0.5, .X ±0.3, .XX ±0.10
Angle: X° ±3°, .X° ±1°
SCALE: FREE
UNIT: mm
REV.: 00
SHEET 1/1
CUSTOMER:

PRO-SIGNAL

CUSTOMER P/N:
COMPANY P/N:
DWG. No.: FLAT CAT6 UTP-01
TITLE: 32AWG CAT6 U/UTP FLAT CABLE

Approved by
Checked by
Design by