
OEM

Technical Datasheet

Product Code: PC808

Description: UK 3A Fused Non-Rewireable ISOD Plug to C7 Connector 2G 0.75mm² H03VVH2-F Cable Black - 2 Metre



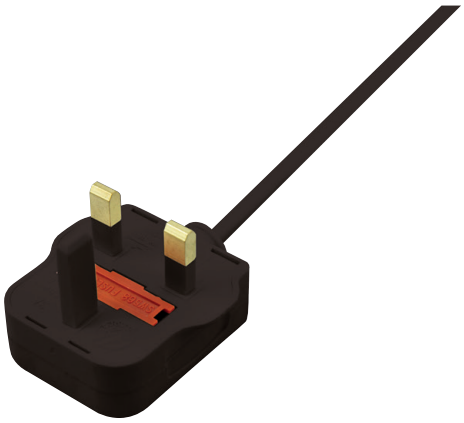

General Information

Complete Powerlead Rating	2.5A/250V	
	Non-Rewireable ISOD UK Plug	**C7 Connector**
Component Rating	3A 250V~	2.5A
Colour	Black	Black
Materials	Cover: PA66 Nylon Pins and Connecting Plate: Brass Fuse Clip: Bronze Belt	Over Moulding: PVC Locating Shelf: PA6 Terminals: Brass Tin Plated
Cable Colour	Black	
Number of Conductors	2	
Conductor Cross Sectional Area	0.75mm²	
Number of Strands	43	
Conductor Material	Bare Copper (99.97%)	
Jacket Material	PVC	
Jacket Wall Thickness	0.6mm	
Jacket Elongation	150%	
Insulation Material	PVC (Colour Coded)	
Insulation Wall Thickness (mm)	0.5mm	
Insulation Elongation	150%	
Nominal Resistance	26 Ohm/Km	
Overall Cable Diameter	3.6mm x 5.7mm	
Bend Radius	18°	
Rated Temperature	-15 to +70°C	
Cable Hanking	200mm Fig. 8	
Features	Class II protection	

Standards

BS 1363-1: 2016 +A1: 2018	(Kitemark Licence KM10807)
BS1362: 1973 plus Amendments 1 & 2	(ASTA File 1101)
DIN EN 50525-2-11: 2012-01	(VDE File 40010839)
BS EN 50525-2-11: 2011	(VDE File 40010839)
BS EN 60320-1: 2015	(ENEC 17 File 4181)
BS EN 60320-3: 2014	(ENEC 17 File 4181)

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

Errors & Omissions excluded.
Specification is subject to change without notice.