ECPE24 Range

24 Watt UK Plug Top Range




Features :

- **UK Plug Top**
- **DOE Level VI Efficiency**
- **Overcurrent Protection**
- **Short Circuit Protection**
- **RoHs Compliant**
- **1 Year Warranty**
- **EN62368 Approved**

Model		ECPE-24-05U	ECPE-24-09U	ECPE-24-12U	ECPE-24-24U
Output	DC Voltage	5vdc	9vdc	12vdc	24vdc
	Rated Current	3amp	2.5amp	2amp	1amp
	Current Range	0-3amp	0-2.5amp	0-2amp	0-1amp
	Rated Power	24 Watt	24 Watt	24 Watt	24 Watt
	Ripple & Noise	240mVp-p max	240mVp-p max	240mVp-p max	240mVp-p max
	Output Regulation	±5%	±5%	±5%	±5%
	Output Connector	2.1x5.5x12mm C+ve	2.1x5.5x12mm C+ve	2.1x5.5x12mm C+ve	2.1x5.5x12mm C+ve
Input	Voltage Range	90-264vac	90-264vac	90-264vac	90-264vac
	Frequency Range	47-63Hz	47-63Hz	47-63Hz	47-63Hz
	Input Current	1.2amp Max	1.2amp Max	1.2amp Max	1.2amp Max
	Inrush Current	40amp Max	40amp Max	40amp Max	40amp Max
	Standby Power	0.1W Max	0.1W Max	0.1W Max	0.1W Max
	Leakage Current	0.25amp Max	0.25amp Max	0.25amp Max	0.25amp Max
	Input Connector	UK	UK	UK	UK
Environment	Operating Temp	0°C~40°C	0°C~40°C	0°C~40°C	0°C~40°C
	Cooling	Convection	Convection	Convection	Convection
	Temperature Coefficient	0.05%/°C	0.05%/°C	0.05%/°C	0.05%/°C
	Humidity	5~95%RH(non-condensing)	5~95%RH(non-condensing)	5~95%RH(non-condensing)	5~95%RH(non-condensing)
	Storage Temp	-20°C~+80%°C	-20°C~+80%°C	-20°C~+80%°C	-20°C~+80%°C
Safety & EMC	Safety Standards	CE EN62368-1			
	EMC Emissions	EN55032,EN55035			

Mechanical Specification

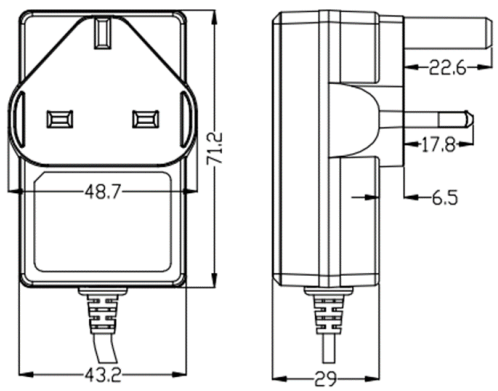

Ecopac UK Power Ltd
Unit 4 Ridgeway
Crendon Industrial Area
Long Crendon
Buckinghamshire, HP18 9BF

www.ecopacpower.co.uk
Tel: +44 (0) 1844 204420
email :enquiry@ecopacpower.co.uk