
TECHNICAL DATA SHEET

RoHS Compliant

H07RN-F TYPE MULTICORE CABLES

PRODUCT CODES: CB19481-CB19500, CB19619

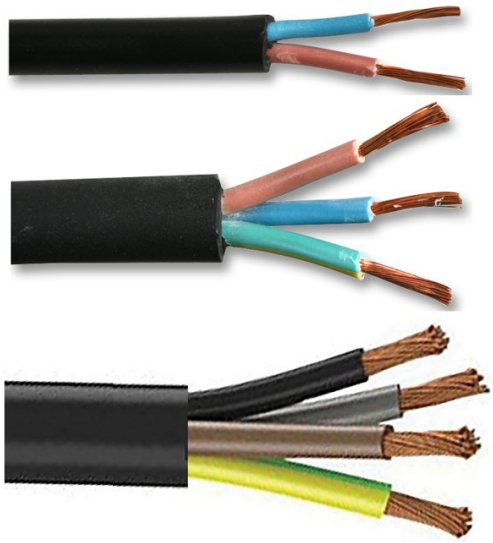

Application:

Suitable for internal or external use. Used where a flexible connection to equipment is required in industrial, agricultural, mobile power supplies and construction applications.
Suitable for medium to heavy-duty use, the jacket is oil-resistant and offers a good balance of mechanical and thermal resistance. Can only be briefly submerged in water.
Black, CPE jacket
Reel length: 50m or 100m

Standards:

EN50525-2-21

Important Notice: This data sheet and its contents (the "Information") belong to pro-POWER. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but pro-POWER assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where pro-POWER was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict pro-POWER's liability for death or personal injury resulting from its negligence.

TECHNICAL DATA SHEET

RoHS Compliant

Construction:

Conductor	Flexible, plain, annealed copper				
Insulation	EPDM				
Cores	2-core	Blue	Brown		
	3-core	Blue	Brown	Green/Yel.	
	4-core	Black	Grey	Brown	Green/Yel.

Characteristics:

Conductor			Insulation	Core	Jacket		Length	Code
Cores x mm²	Stranding	Outside Diameter (mm)	Average Thickness (mm)	Diameter (mm)	Average Thickness (mm)	Diameter (mm)		
2x1.00	32/0.191	1.25	0.80	2.90	1.30	8.40	50m	CB19482
							100m	CB19481
2x1.50	30/0.238	1.51	0.80	3.20	1.20	9.40	50m	CB19484
							100m	CB19483
2x2.50	49/0.238	1.92	0.90	3.90	1.70	11.20	50m	CB19486
							100m	CB19485
3x1.00	32/0.191	1.25	0.80	2.90	1.40	9.00	50m	CB19488
							100m	CB19487
3x1.50	30/0.238	1.51	0.80	3.20	1.60	10.10	1m	CB19619
							50m	CB19490
							100m	CB19489
3x2.50	49/0.238	1.92	0.90	3.90	1.80	12.00	50m	CB19492
							100m	CB19491
3x4.00	56/0.238	2.47	1.00	4.65	1.90	13.80	50m	CB19494
							100m	CB19493
4x1.00	32/0.191	1.25	0.80	2.90	1.50	10.20	50m	CB19496
							100m	CB19495
4x1.50	30/0.238	1.51	0.80	3.20	1.70	11.10	50m	CB19498
							100m	CB19497
4x2.50	49/0.238	1.92	0.90	3.90	1.90	13.20	50m	CB19500
							100m	CB19499

Important Notice: This data sheet and its contents (the "Information") belong to pro-POWER. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but pro-POWER assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where pro-POWER was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict pro-POWER's liability for death or personal injury resulting from its negligence.