
Motor & power shield for Arduino™


Component VMA03

Power shield that can drive: relays, solenoids, DC and stepper motors

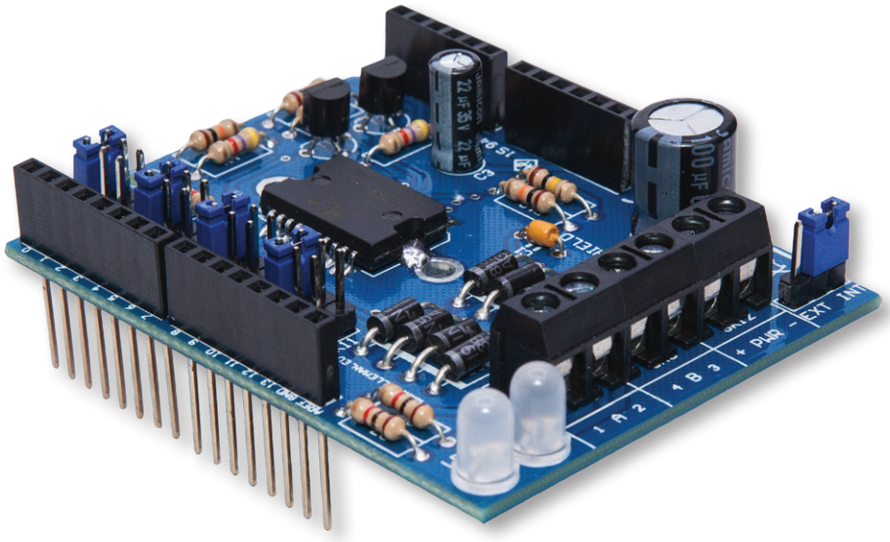


Features

- 2 channels
- choose between an external or internal (Vin) power supply
- based on the dual full bridge driver L298P
- downloadable sample sketch
- stackable design: the shield can be stacked with other shields
- large user community
- requires 1 Arduino™ UNO (not included)

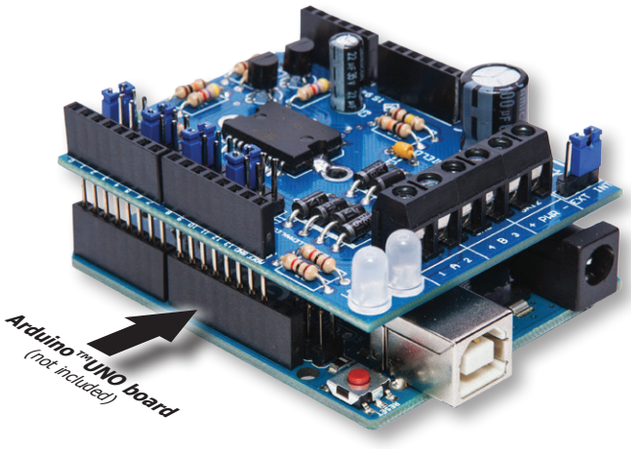

Specifications

- 2.5 A (max.) output current (each channel)
- 50 V (max.) external power supply input
- used pins on an Arduino™ UNO board can be selected to accommodate for other stacked shields
- dimensions: 68 x 53mm / 2.67 x 2.08"



Output A

Output B

External Power
(50V MAX!)

