COMUS Group

COMUS Europe Ltd

Part Number: S1372
Proximity Switch - Reed Switch based
Cylindrical - Normally Open Contacts - Suggested Magnet: PRLM

PICTURE



✔RoHS Compliant

APPLICATIONS INCLUDE


- Position and limit sensing
- Linear actuators
- Security system switch
- Door Switch

OPTIONS

- Miniature
- Custom cable lengths, strip lengths, cable types, terminations.
- If you do not see what you need, just ask, as there is a strong possibility we can do it !

DIMENSIONS

Drawings not to scale.
All dimensions in inches (mm) nominal.

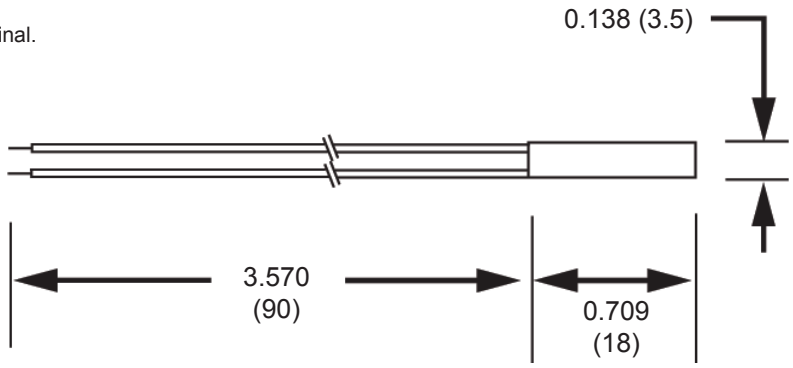

SPECIFICATION

Contact Form / Style	Normally Open
Switching Capacity (Resistive)	10 W/VA Max.
Switching Voltage	200 VAC Max.
Switching Current	0.5 A. Max.
Carry Current	0.5 A. Max.
Breakdown Voltage	230 VDC Min.
Contact Resistance	115 mOhms Max.
Switching Distance	5 mm Min.
Operating Temperature Range	-20°C +85°C
Storage Temperature	-25°C +90°C
Case Material	Black Polypropylene
Cable	2 x 0.12mm^2 PTFE Insulated Black

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900 **www.comus-intl.com** **Fax: (1) 973 777 8405**

Belgium: + 32 (0)12 390400 - Comus Europe (Assemtech) UK: +44 (0) 1255 862236 - Germany: +49 (0)911 923 15 943

©2013 Copyright Comus International, 454 Allwood Road, Clifton NJ 07012, USA

An ISO 9001 Certified Company