
SGS-THOMSON MICROELECTRONICS

TXN/TYN 0512 ---> TXN/TYN 1012

SCR

FEATURES

- HIGH SURGE CAPABILITY
- HIGH ON-STATE CURRENT
- HIGH STABILITY AND RELIABILITY
- TXN Serie :
  INSULATED VOLTAGE = 2500$V_{(RMS)}$
  (UL RECOGNIZED : E81734)

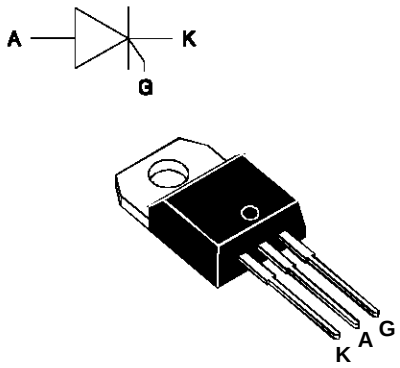

TO220AB
(Plastic)

DESCRIPTION

The TYN/TXN 0512 ---> TYN/TXN 1012 Family of Silicon Controlled Rectifiers uses a high performance glass passivated technology.
This general purpose Family of Silicon Controlled Rectifiers is designed for power supplies up to 400Hz on resistive or inductive load.

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter			Value	Unit
$I_{T(RMS)}$	RMS on-state current (180° conduction angle)	TXN TYN	Tc=80°C Tc=90°C	12	A
$I_{T(AV)}$	Average on-state current (180° conduction angle,single phase circuit)	TXN TYN	Tc=80°C Tc=90°C	8	A
I_{TSM}	Non repetitive surge peak on-state current (Tj initial = 25°C)		tp=8.3 ms	125	A
			tp=10 ms	120	
I^2t	I^2t value		tp=10 ms	72	A^2s
dI/dt	Critical rate of rise of on-state current Gate supply : I_G = 100 mA di_G/dt = 1 A/µs			100	A/µs
Tstg Tj	Storage and operating junction temperature range			- 40 to + 150 - 40 to + 125	°C °C
Tl	Maximum lead temperature for soldering during 10 s at 4.5 mm from case			260	°C

Symbol	Parameter	TYN/TXN							Unit
		0512	112	212	412	612	812	1012	
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Tj = 125 °C	50	100	200	400	600	800	1000	V

THERMAL RESISTANCES

Symbol	Parameter		Value	Unit
Rth (j-a)	Junction to ambient		60	°C/W
Rth (j-c) DC	Junction to case for DC	TXN	3.5	°C/W
		TYN	2.5	

GATE CHARACTERISTICS (maximum values)

$P_{G\ (AV)}$ = 1W P_{GM} = 10W (tp = 20 µs) I_{FGM} = 4A (tp = 20 µs) V_{RGM} = 5 V.

ELECTRICAL CHARACTERISTICS

Symbol	Test Conditions			Value	Unit
I_{GT}	V_D=12V (DC) R_L=33Ω	Tj=25°C	MAX	15	mA
V_{GT}	V_D=12V (DC) R_L=33Ω	Tj=25°C	MAX	1.5	V
V_{GD}	V_D=V_{DRM} R_L=3.3kΩ	Tj= 125°C	MIN	0.2	V
tgt	V_D=V_{DRM} I_G = 40mA dI_G/dt = 0.5A/µs	Tj=25°C	TYP	2	µs
I_L	I_G= 1.2 I_{GT}	Tj=25°C	TYP	50	mA
I_H	I_T= 100mA gate open	Tj=25°C	MAX	30	mA
V_{TM}	ITM= 24A tp= 380µs	Tj=25°C	MAX	1.6	V
I_{DRM} I_{RRM}	V_{DRM} Rated V_{RRM} Rated	Tj=25°C	MAX	0.01	mA
		Tj= 125°C		3	
dV/dt	Linear slope up to V_D=67%V_{DRM} gate open	Tj= 125°C	MIN	200	V/µs
tq	V_D=67%V_{DRM} I_{TM}= 24A V_R= 25V dI_{TM}/dt=30 A/µs dV_D/dt= 50V/µs	Tj= 125°C	TYP	70	µs

Fig.1 : Maximum average power dissipation versus average on-state current (TXN).

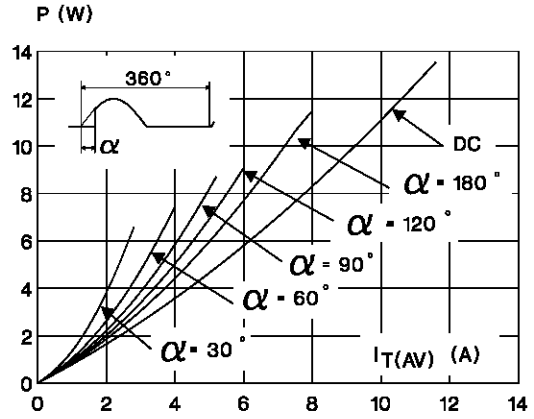


Fig.2 : Correlation between maximum average power dissipation and maximum allowable temperatures (T_{amb} and T_{case}) for different thermal resistances heatsink + contact (TXN).

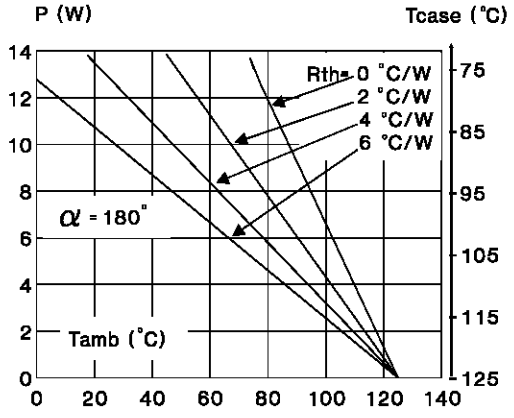


Fig.3 : Maximum average power dissipation versus average on-state current (TYN).

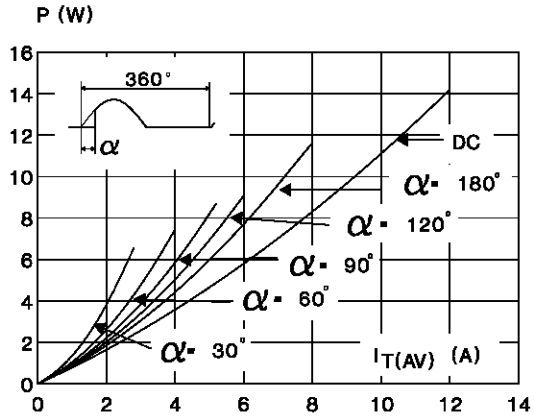


Fig.4 : Correlation between maximum average power dissipation and maximum allowable temperatures (T_{amb} and T_{case}) for different thermal resistances heatsink + contact (TYN).

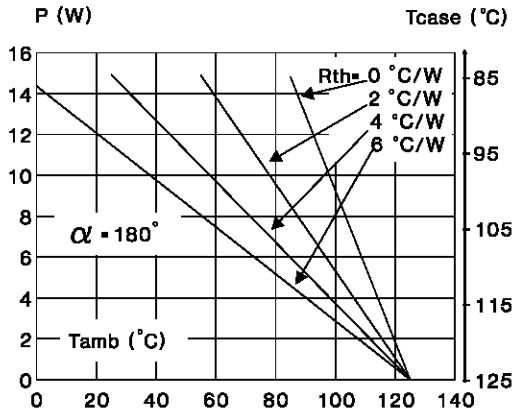


Fig.5 : Average on-state current versus case temperature (TXN).

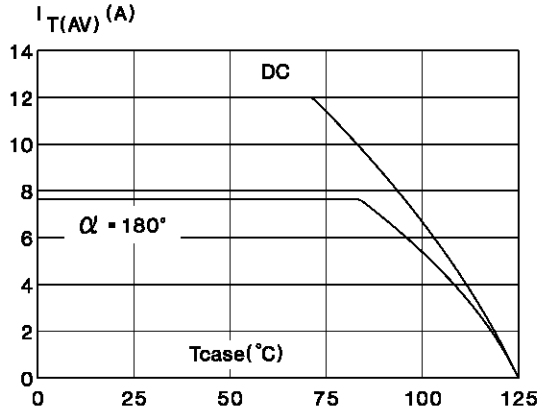


Fig.6 : Average on-state current versus case temperature (TYN).

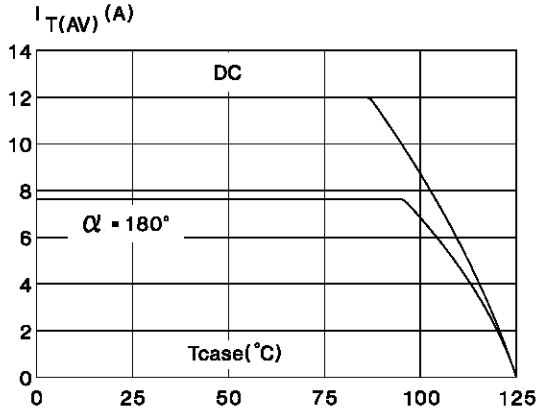


Fig.7 : Relative variation of thermal impedance versus pulse duration.

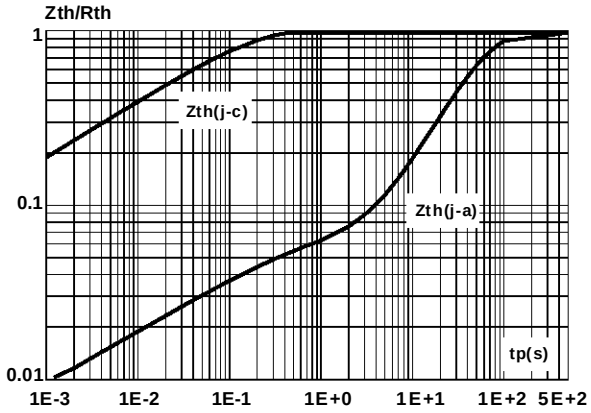


Fig.8 : Relative variation of gate trigger current versus junction temperature.

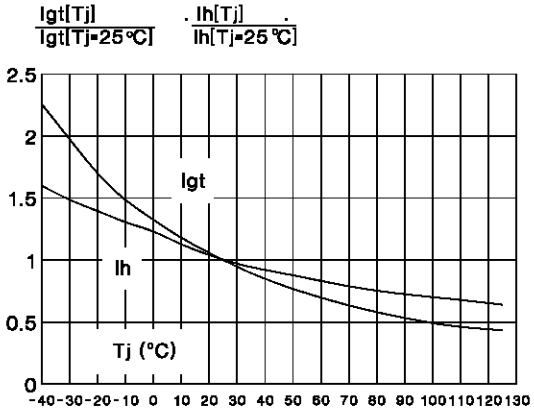


Fig.9 : Non repetitive surge peak on-state current versus number of cycles.

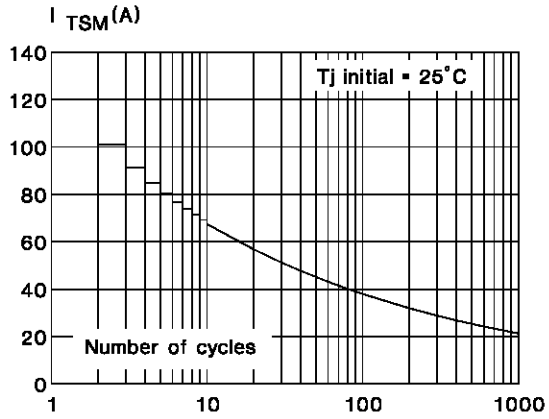


Fig.10 : Non repetitive surge peak on-state current for a sinusoidal pulse with width : t ≤ 10 ms, and corresponding value of I^2t.



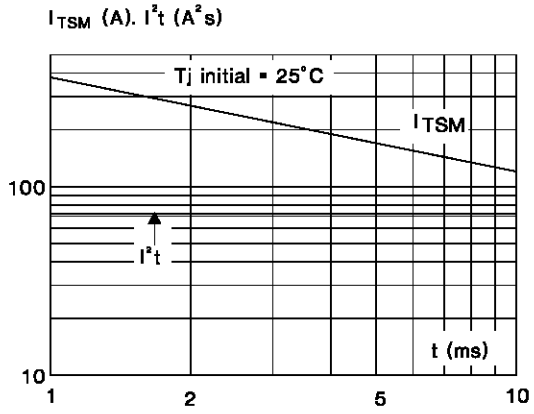


Fig.11 : On-state characteristics (maximum values).

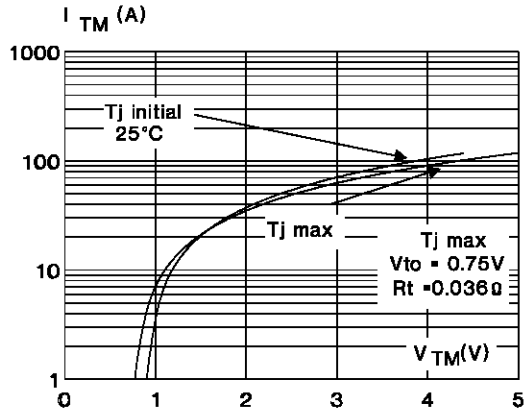

PACKAGE MECHANICAL DATA

TO220AB Plastic

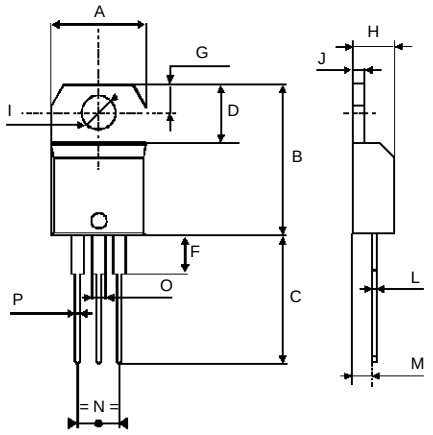

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	10.00	10.40	0.393	0.409
B	15.20	15.90	0.598	0.625
C	13.00	14.00	0.511	0.551
D	6.20	6.60	0.244	0.259
F	3.50	4.20	0.137	0.165
G	2.65	2.95	0.104	0.116
H	4.40	4.60	0.173	0.181
I	3.75	3.85	0.147	0.151
J	1.23	1.32	0.048	0.051
L	0.49	0.70	0.019	0.027
M	2.40	2.72	0.094	0.107
N	4.80	5.40	0.188	0.212
O	1.14	1.70	0.044	0.066
P	0.61	0.88	0.024	0.034

Cooling method : by conduction (method C)
Marking : type number
Weight : 2.3 g
Recommended torque value : 0.8 m.N.
Maximum torque value : 1 m.N.

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsability for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied.
SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1995 SGS-THOMSON Microelectronics - Printed in Italy - All rights reserved.
SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.