

USB3.0 A-B EARTHED METAL FEEDTHROUGH CONNECTOR

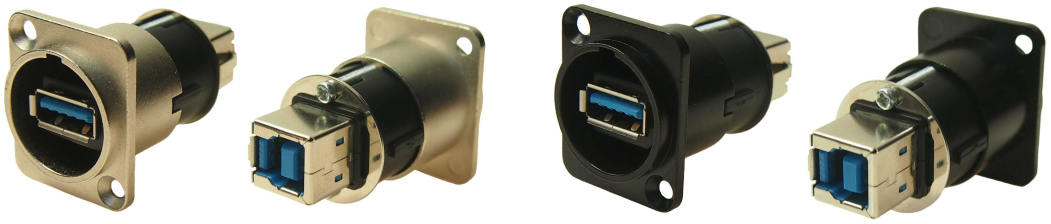

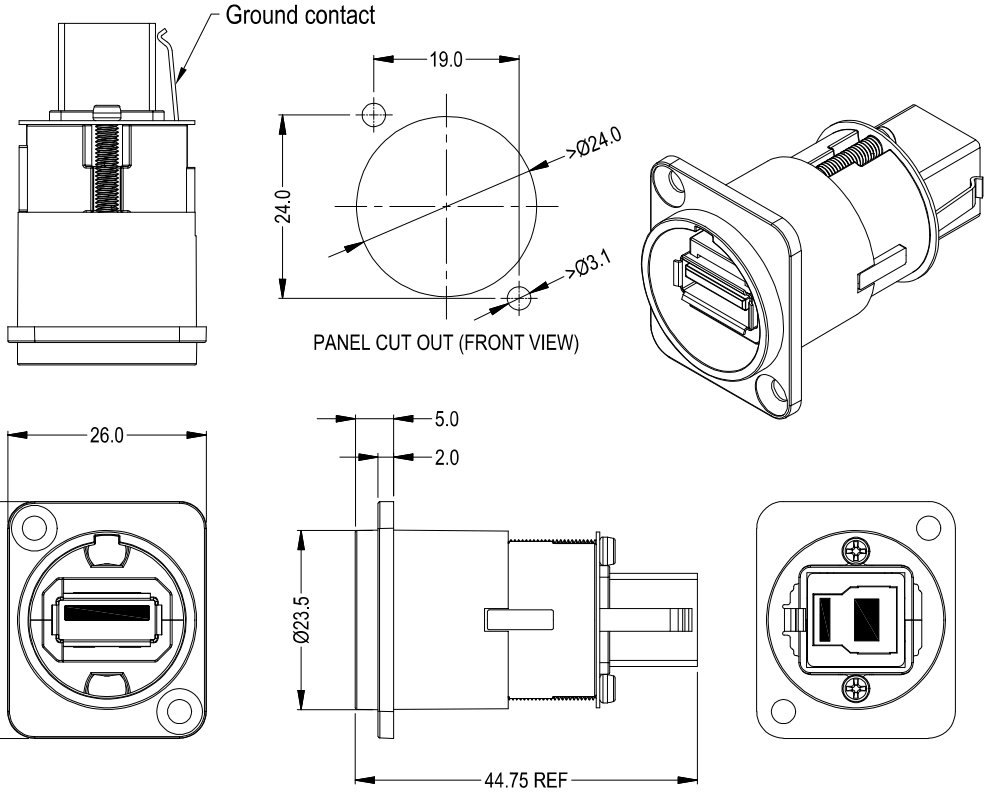

Feedthrough Features

- Fits standard XLR Ø24mm cutout.
- No soldering or punch termination. Use standard cable for each connector style.
- Front or rear mounted.

General:
Please note: Functionality is affected by cable quality, length and cable wiring configuration.

VARIANTS
Part No.
CP30106 - USB3.0 A-B Female Metal Earthed Feedthrough Nickel CSK hole
CP30108 - USB3.0 A-B Female Metal Earthed Feedthrough Black CSK hole

Material
1. Metal Frame: Diecast, Black or Nickel plated
2. USB Connector: PBT
3. USB Contacts: Gold plated
4. Contacts: Brass,Tin or Nickel plated

Notes
Contact Resistance: ≤ 30mΩ
Dielectric Strength: 500V AC
Insulation Resistance :1000MΩ
Operating Temperature: -25°C to +85°C
Rated Current: 1.5A
Rated Voltage: 30V
Lifetime: >1500 mating cycles

© CLIFF 07/2025 ISS.2

For further information, contact sales@cliffuk.co.uk

Cliff Electronic Components Limited,
76 Holmethorpe Avenue, Holmethorpe Ind. Estate,
Redhill, Surrey RH1 2PF U.K.
Tel: +44 (0)1737 771375 Fax: +44 (0)1737 766012

www.cliffuk.co.uk

RoHS