

Product image serves as example only.

MSM-328

Flatpack Magnet


Data

Housing Material	PA-GF, black
Potting Material	Epoxy, black
Orientation	over housing length

Magnetic Material	N30H	
Remanence Br	mT	1105
Coercivity HcB	kA/m	836
Coercitivity HcJ	kA/m	1274
Energy Product (BH) max.	kJ/m^3	235
Magnetic Moment M	$x10^{-5}$ Vs cm	3.5
Operating Temperature	°C	-20 to 85
Temperature Coefficient Tk(Br)	%/°C	-0.11

Nominal values unless otherwise specified

Dimensions in mm

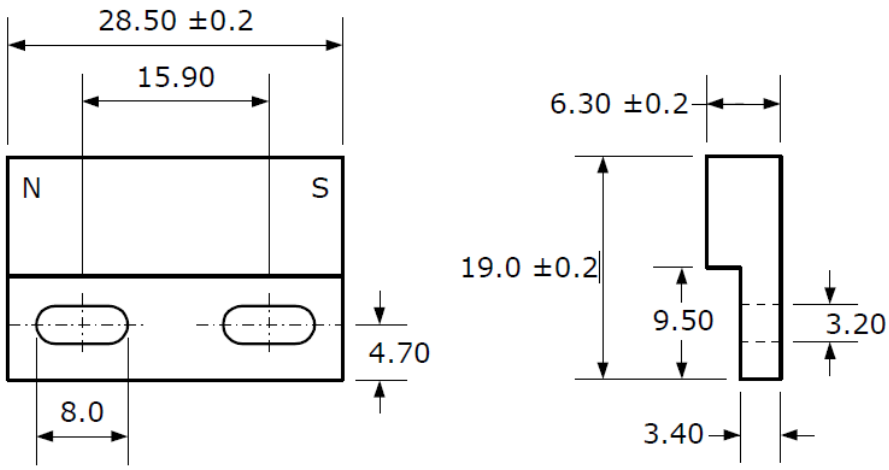

Customized types, other magnet materials and high temperature grades available.

PIC Proximity Instrumentation Controls
Kontaktbauelemente GmbH
Nibelungenstr. 5A
90530 Wendelstein, Germany
Phone +49 9129 907089-0
Fax +49 9129 907089-99
info@pic-gmbh.com
pic-gmbh.com